Full Size C/K Utilities

Model Symbol Chart 1
Snow Plow Prep. Package ..... See Light Duty BBM "Special Applications – Snow Plow Prep Package" section
General Information ..... See Light Duty BBM "General Information" section
Trailering Information ..... See Light Duty Online Order/Ref. Guide – Light Duty "Trailering Specs"
Model and Option Weights ..... See Light Duty Online Order/Ref. Guide "Model & Opt. Weights" & "Weight Calculator"

VEHICLE
GENERAL ARRANGEMENT
C/K 15706 2
C/K 15906 3
BODY – EXTERIOR
FRONT END CLIPS
C/K 150 (06) 4
HOOD OPENINGS
C/K 150 (06) 5
HOOD PROFILES
GMC Z88 – C/K 150 (06) 6
Chevy X88 – C/K 150 (06) 7
SIGN AREA
C/K15706 8
C/K15 906 9
MIRRORS, OUTSIDE REARVIEW
C/K 150 (06) SUV, Options DL3 and DL8 10
C/K 150 (06) SUV, Options DPN and DE2 11
ROOF RACK
Overall Height C/K 150 (06) 12

Full Size C/K Utilities

BODY – INTERIOR

SEATING ARRANGEMENT

Seating Positions and H Points 1st Row Front View, Utilities – C/K 150 (06) 13

Seating Positions and H Points 2nd Row Front View, Utilities – C/K 150 (06) 14

Seating Positions and H Points 3rd Row Front View, Utilities – C/K 150 (06) 15

Seating Positions and H Points Side View, Utilities – C/K 150 (06) 16

SEAT MOUNTING HOLES LOCATIONS – FLOOR

C/K 15706 1st and 2nd Rows 17

C/K 15706 1st and 3rd Rows 18

C/K 15 906 1st, 2nd and 3rd Rows 19

CHASSIS

DATUM HOLE LOCATION – FRAME

C/K 150 (00) 20

FRAME RAIL AND CROSSMEMBER LOCATION

C/K 15706 21

C/K 159 (06) 22

SPARE TIRE LOCATION 23

PLATFORM HITCH

Utilities C/K 150 (06) 24

FRONT AXLE/TIRE DATA

Front Axle/Tire Data Drawing – C/K15 (706/906) 25

Front Axle/Tire Data Chart – C/K15 (706/906) 26

CHASSIS – *Continued*

REAR AXLE/TIRE DATA

Rear Axle/Tire Data Drawing – C/K 150 (06)....27

Rear Axle/Tire Data Chart – C/K 150 (06)....28

FUEL SYSTEMS

C/K 15706....29

C/K 15906....30

EXHAUST SYSTEMS

C/K 157/159 (06) w/LMG & L9C (5.3L V8)....31

Full Size C/K Utilities

Model Symbol Chart

						
MARKETS (Optional)	**ENGINEERING MODEL**	**4-DOOR UTILITY WITH REAR LIFTGATE / LIFTGLASS**	**4-DOOR UTILITY WITH REAR LIFTGATE / LIFTGLASS**	**GVWR (kg/lbs)**	**WHEELBASE (mm/in)**	**CAB-TO-AXLE (mm/in)**
All	C157	06 + E52		3220/7100	2946/116.0	
All	C159		06 + E52	3311/7300	3302/130.0	
All	K157	06 + E52		3311/7300	2946/116.0	
All	K159		06 + E52	3402/7500	3302/130.0	

Full Size C/K Utilities

C/K 15706 – General Arrangement

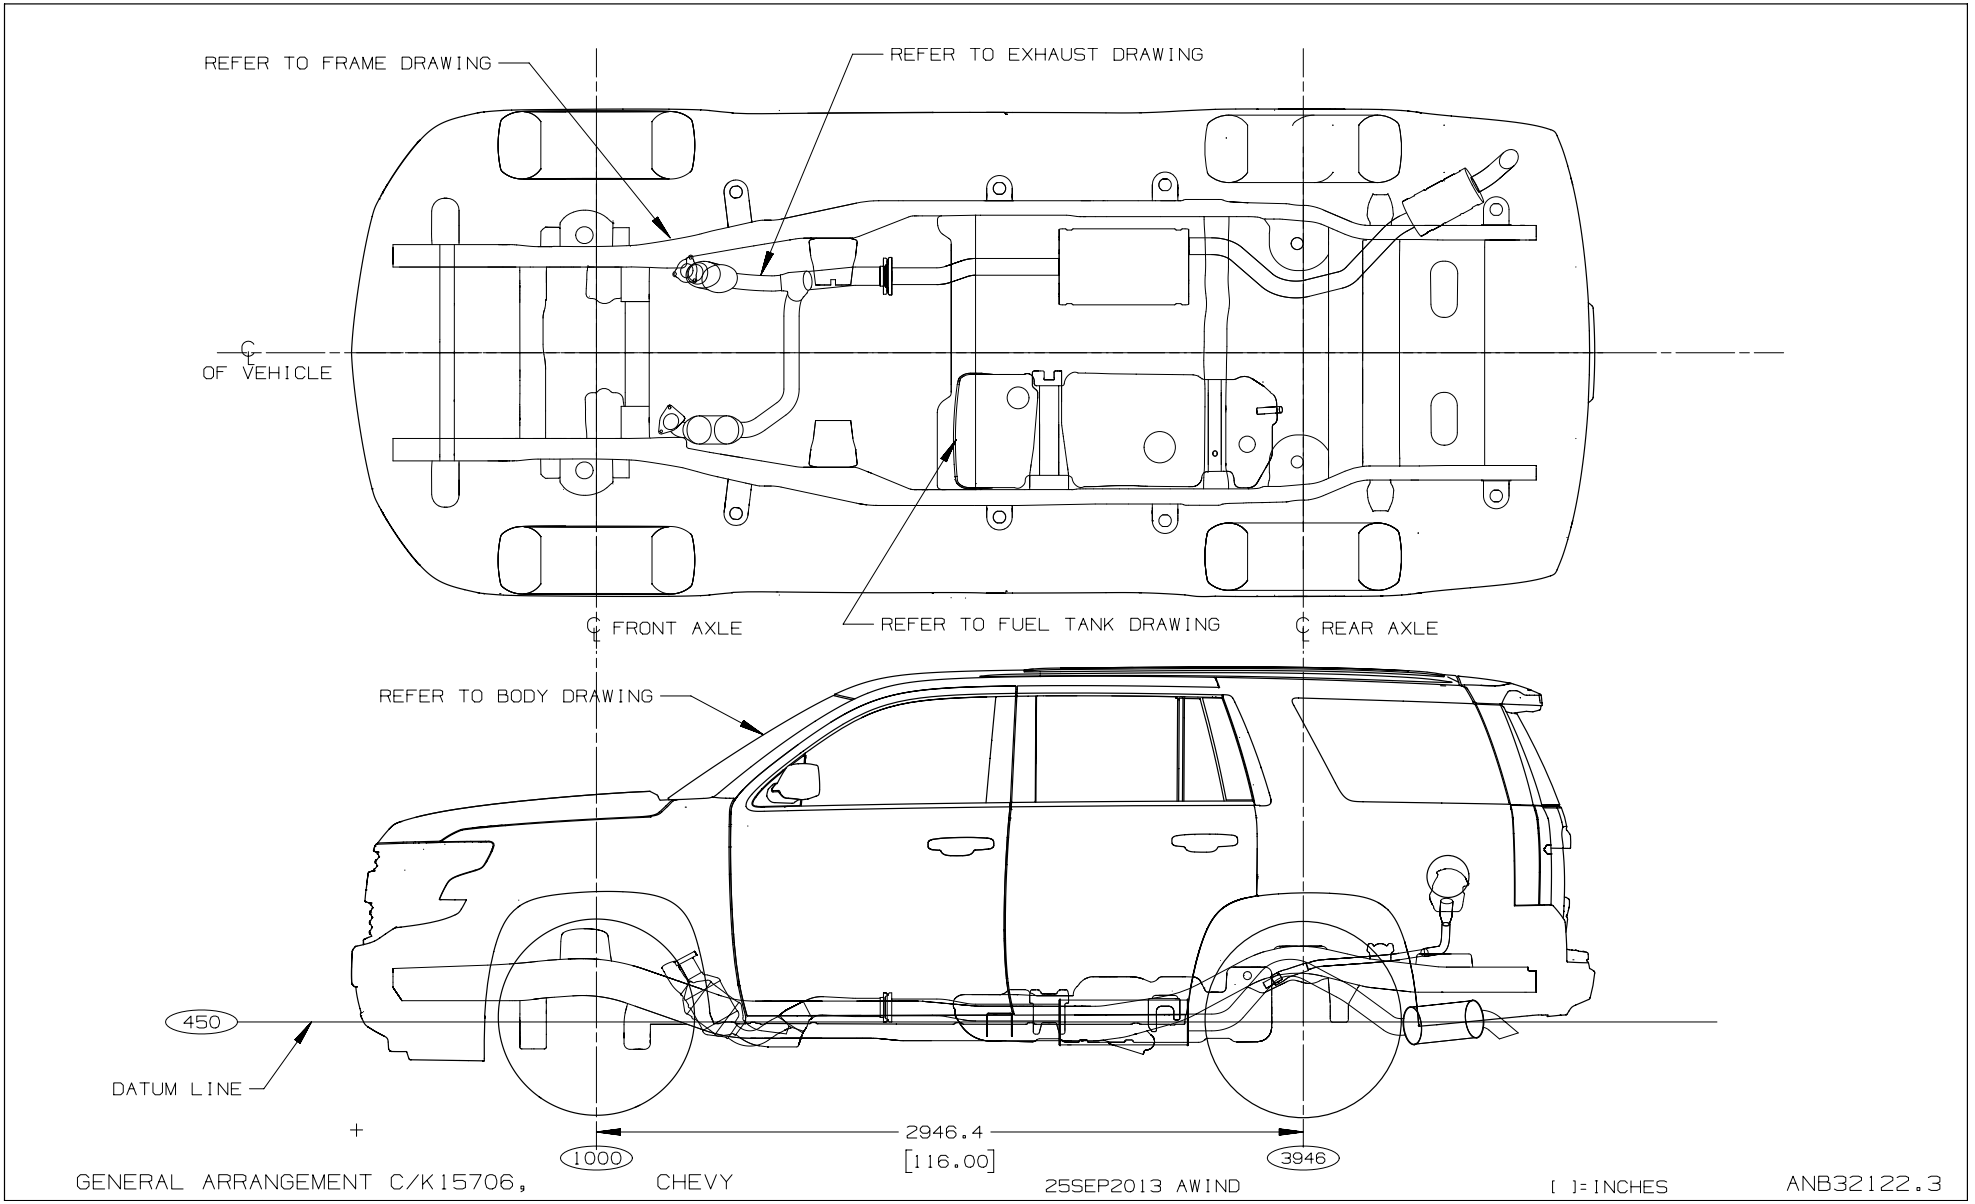

Full Size C/K Utilities

C/K 15906 – General Arrangement

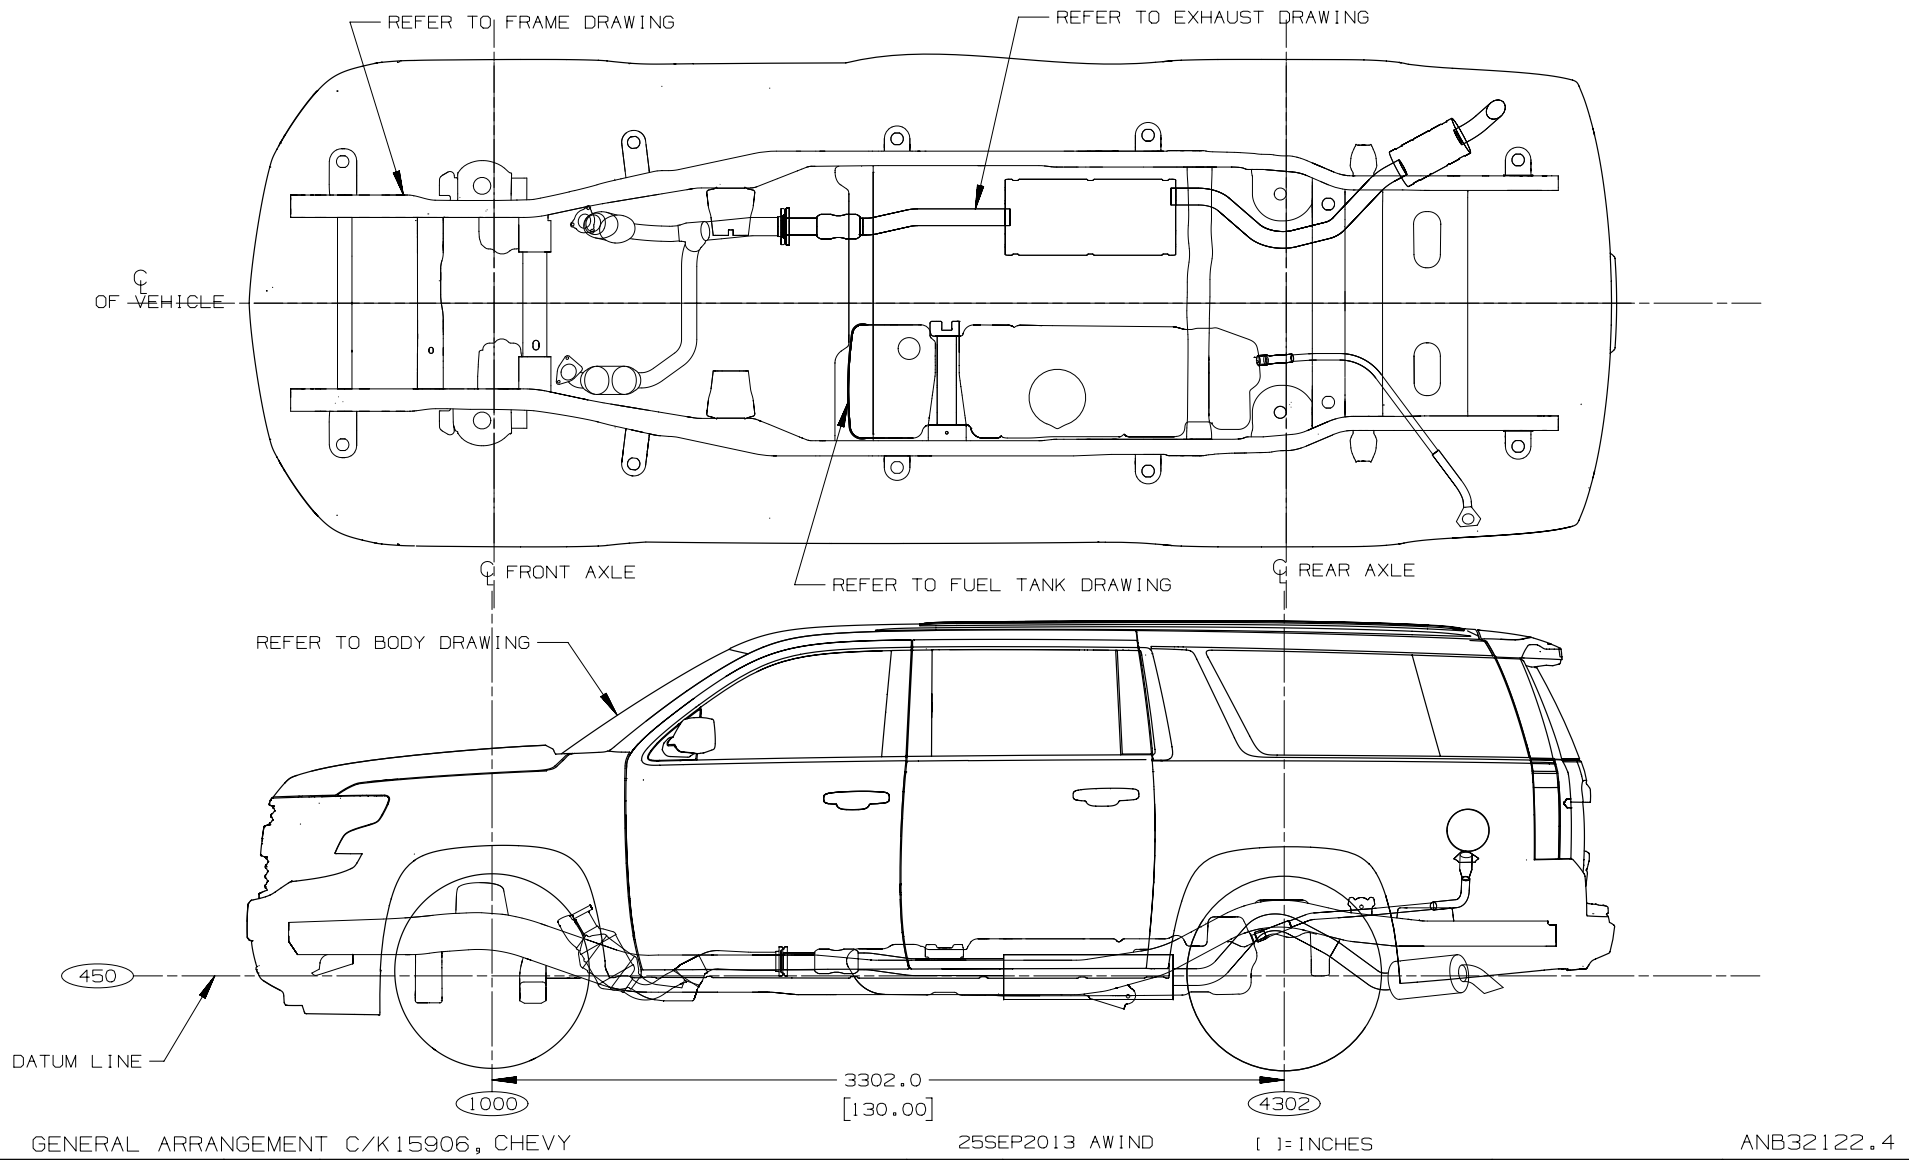

Full Size C/K Utilities

C/K 150 (06) – Front End Clips

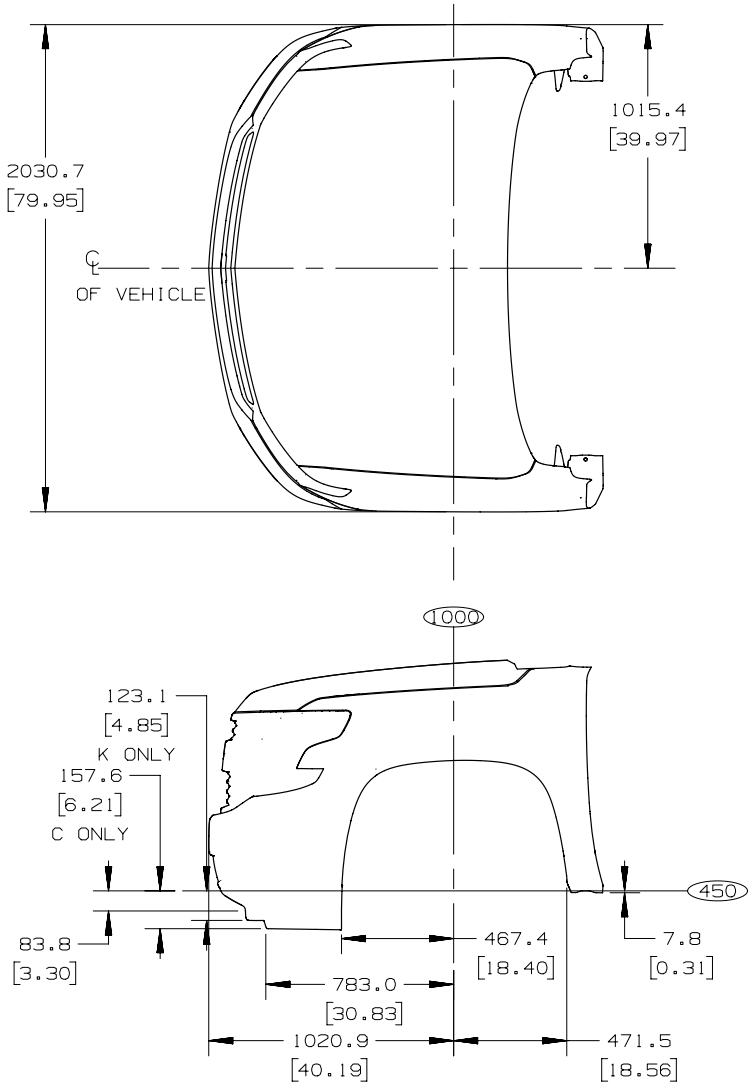

CK150 06/36 X88: CHEVROLET

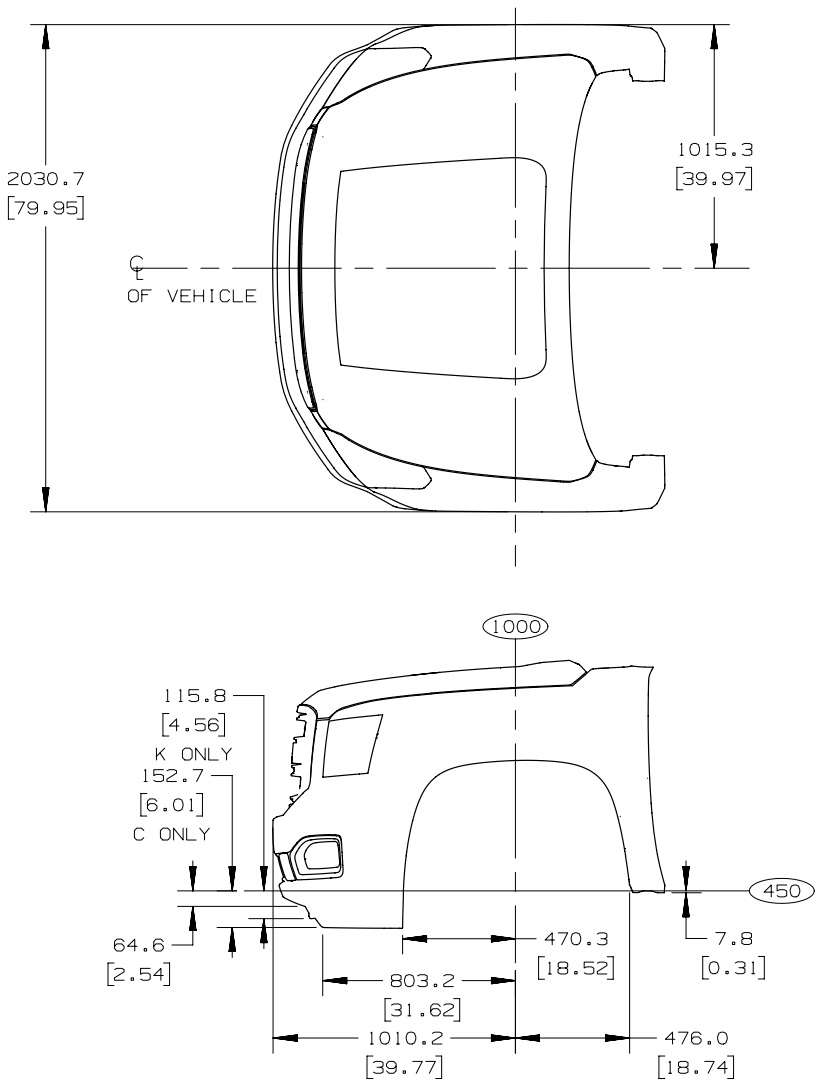

CK150 06/36 Z88: GMC

23SEP13 AWIND

[ ]=INCHES

ANB43157.3

Full Size C/K Utilities

C/K 150 (06) – Hood Openings

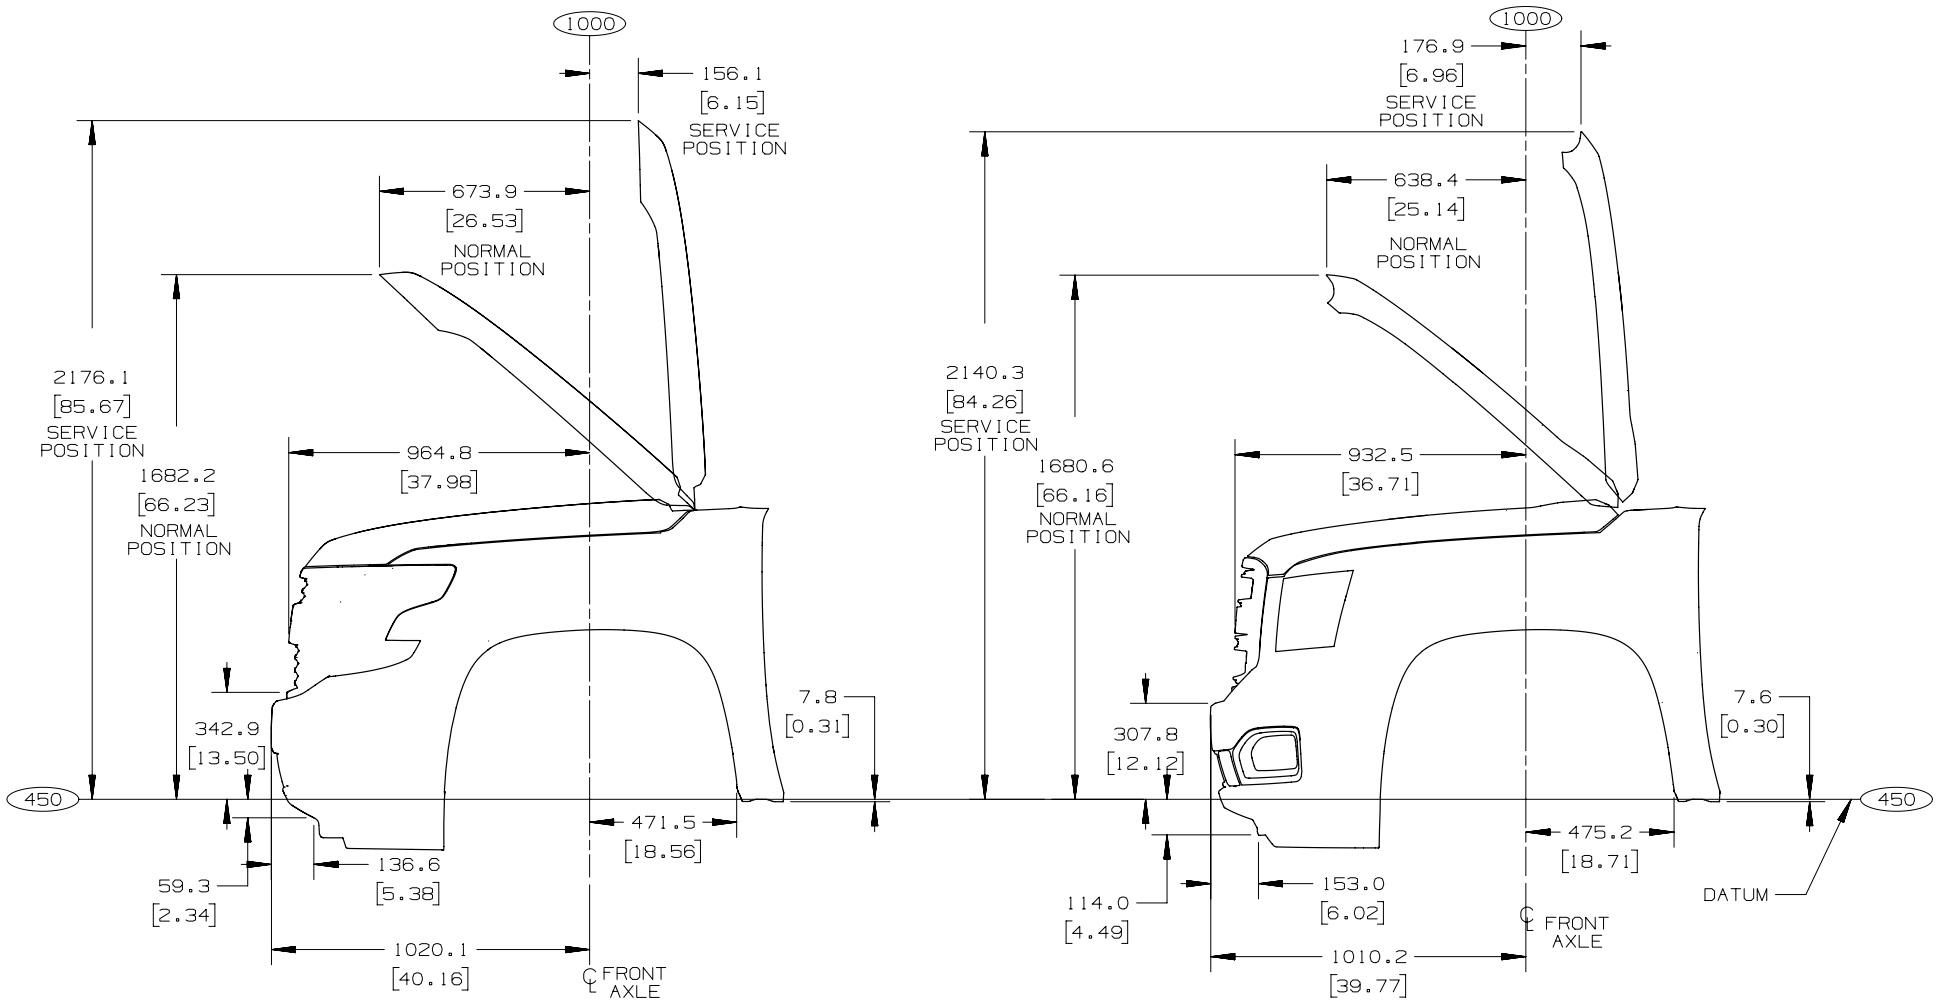

Full Size C/K Utilities

GMC Z88 – C/K 150 (06) – Hood Profiles

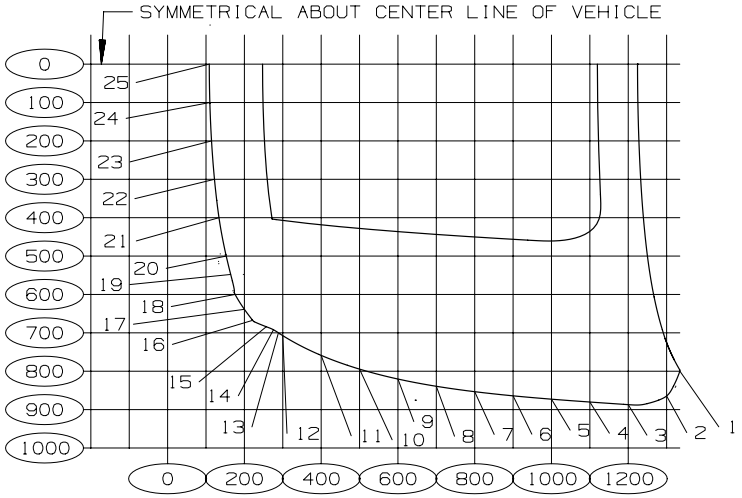

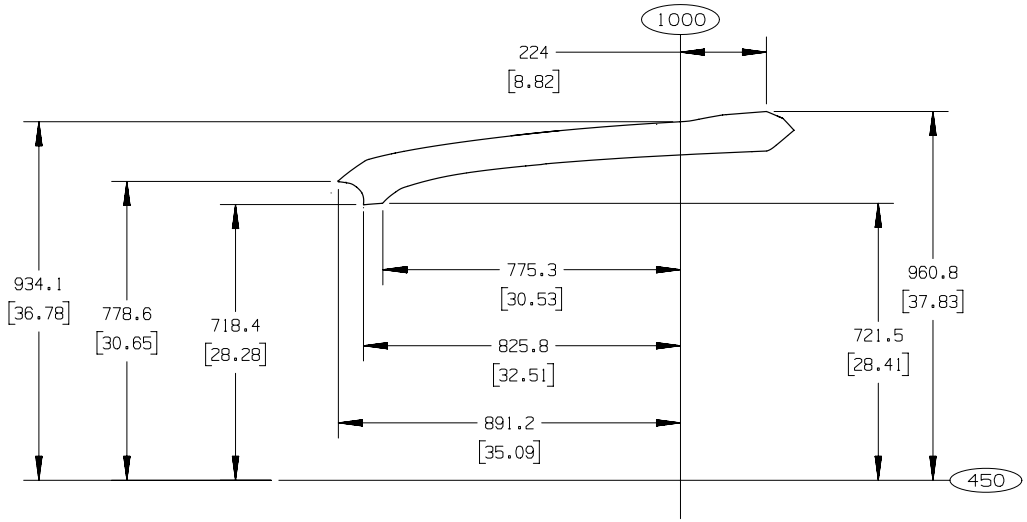

PT.#	LENGTH	WIDTH
1	1334.3	800.0
2	1300.0	864.5
3	1200.0	887.1
4	1100.0	880.3
5	1000.0	872.8
6	900.0	864.1
7	800.0	853.3
8	700.0	839.3
9	600.0	820.4
10	500.0	794.5
11	400.0	758.8
12	300.0	708.0
13	288.7	700.0
14	275.7	692.0
15	257.0	684.1
16	223.5	667.4
17	200.0	638.8
18	175.9	600.0
19	164.3	547.9
20	152.7	500.0
21	133.8	400.0
22	122.1	300.0
23	114.4	200.0
24	110.0	100.0
25	108.5	0.00

DRIVER SIDE COORDINATES

HOOD PROFILE Z88(GMC) C/K150 06 2015 23SEP2013 AWIND [ ] = INCHES ANB47416.3

Full Size C/K Utilities

Chevy X88 – C/K 150 (06) – Hood Profiles

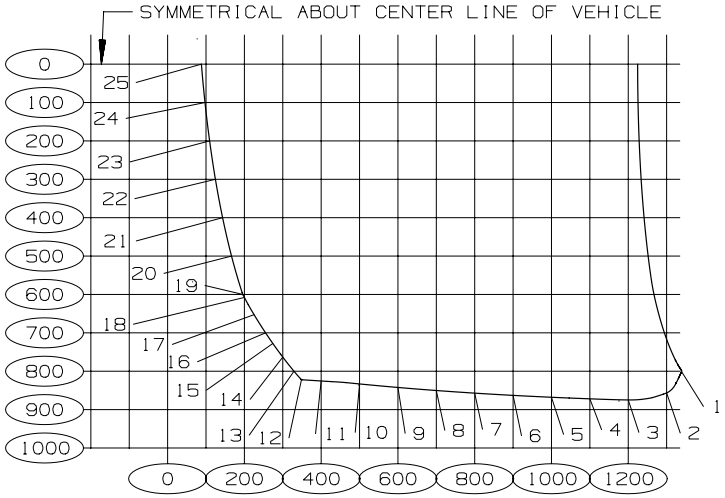

PT.#	LENGTH	WIDTH
1	1338.7	800.6
2	1300.0	856.5
3	1200.0	874.8
4	1100.0	871.9
5	1000.0	867.8
6	900.0	862.9
7	800.0	857.1
8	700.0	850.3
9	600.0	842.3
10	500.0	833.1
11	400.0	825.5
12	348.8	822.0
13	329.2	800.0
14	300.0	763.2
15	274.1	727.7
16	255.2	700.0
17	225.2	652.6
18	200.0	607.9
19	196.0	600.0
20	166.5	500.0
21	143.2	400.0
22	124.5	300.0
23	109.4	200.0
24	97.4	100.0
25	88.0	0.00

DRIVER SIDE COORDINATES

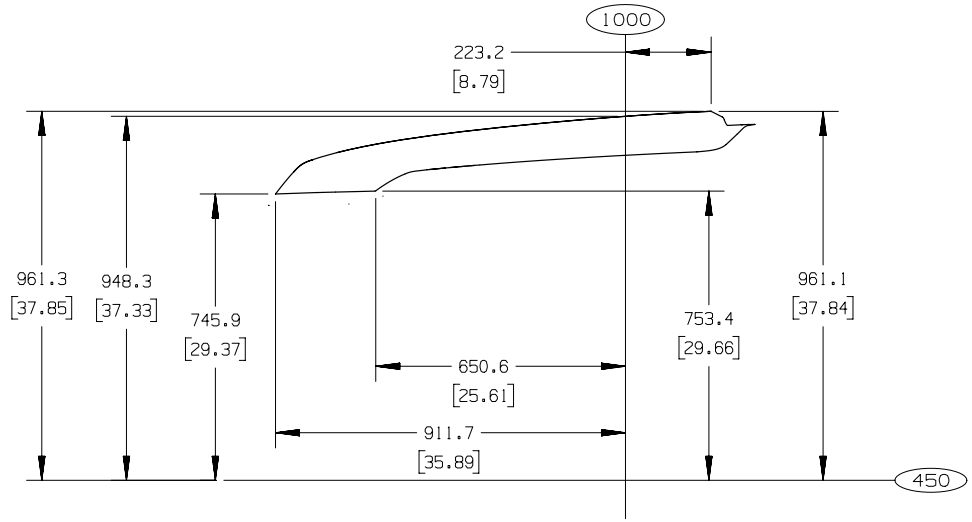

HOOD PROFILE X88(CHEV) C/K150 06 2015 25SEP2013 AWIND [ ] = INCHES ANB49774.3

Full Size C/K Utilities

C/K15706 – Sign Area

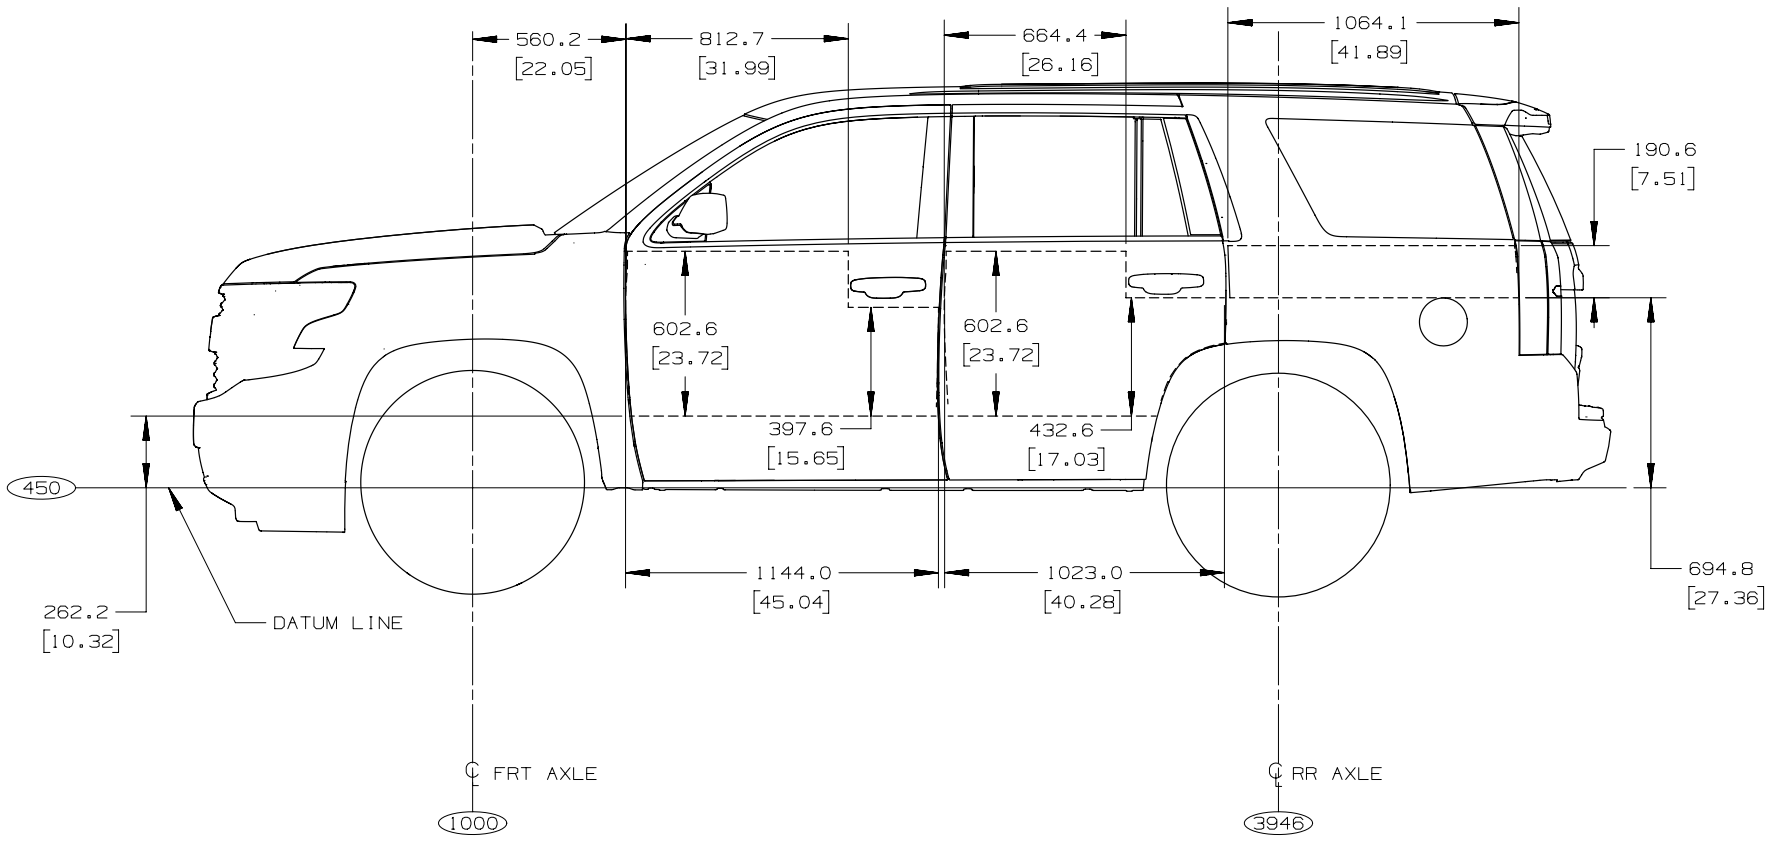

SUV CK15706 WLB116 SIGN AREA X88 SHOWN

25SE02013 AWIND [ ]= INCHES ANC41481.3

Full Size C/K Utilities

C/K15 906 – Sign Area

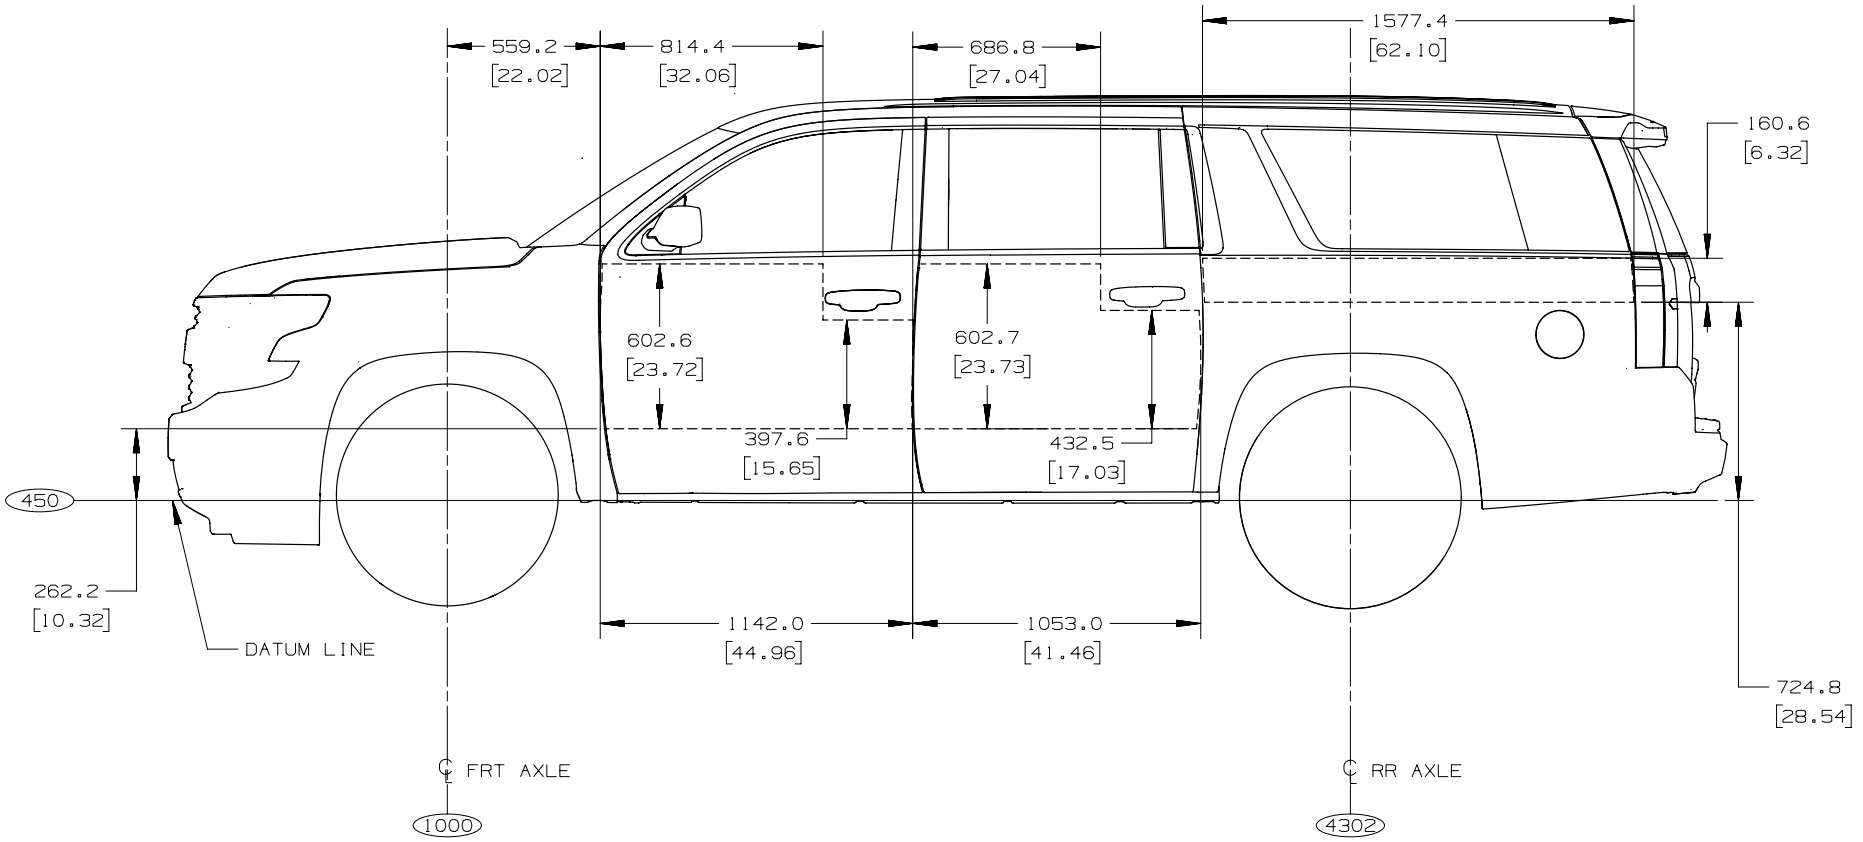

SUV CK15906 WLB130 SIGN AREA X88 SHOWN

25SEP2013 AWIND [ ]= INCHES ANC41481.4

Full Size C/K Utilities

C/K150 (06) SUV, options DL3 and DL8 – Mirrors, Outside Rearview

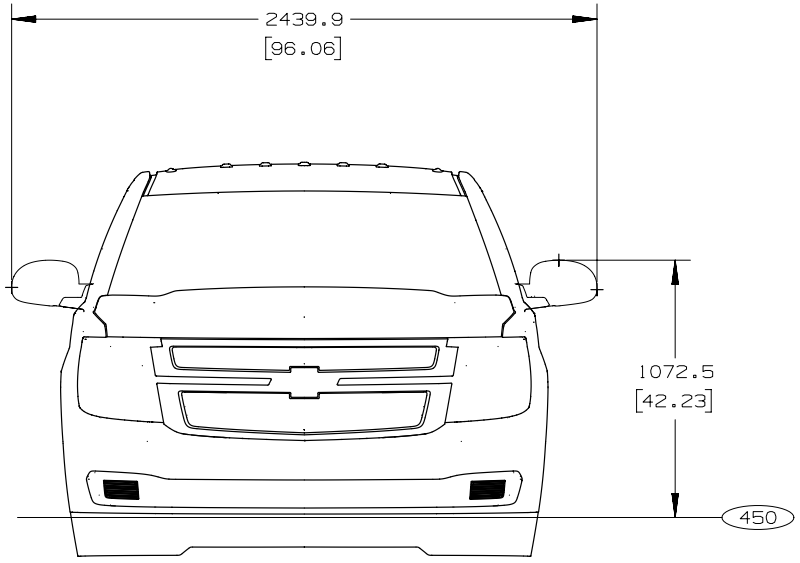

*DL3 SUV (TRUCK 1000 SERIES)

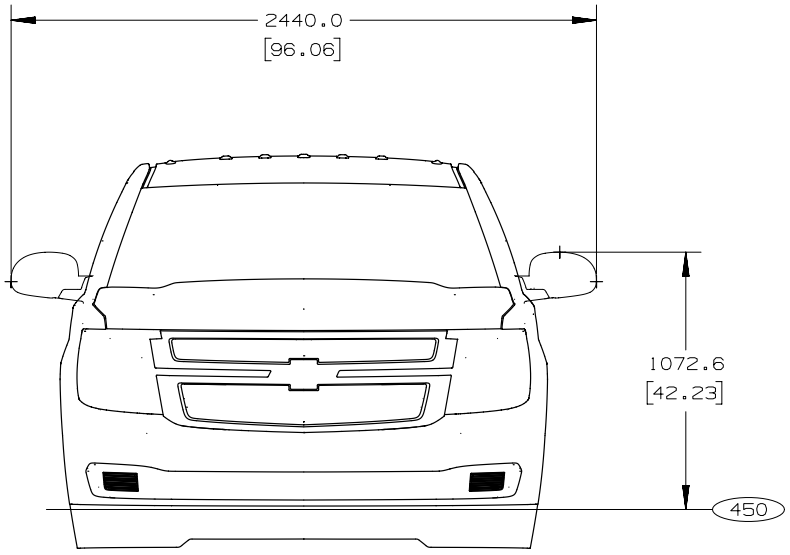

*DL8 SUV ONLY

ALL DIMENSIONS SHOWN FOR CHEVY
BASE MODEL UNLESS OTHERWISE NOTED

SUV 06 / TRUCK 1000 SERIES | 10DEC2013 AJW | ( ) = INCHES | ANC22057.3

Full Size C/K Utilities

C/K150 (06) SUV, options DPN and DE2 – Mirrors, Outside Rearview

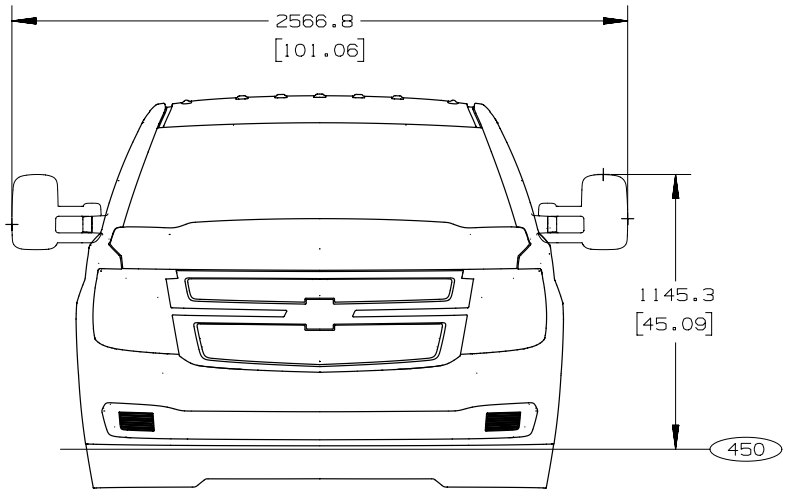

*DPN SUV (TRUCK 1000 SERIES)

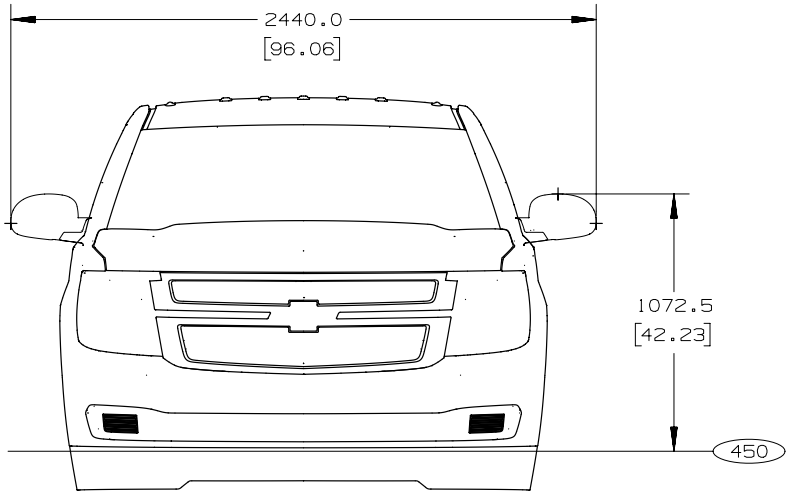

*DE2 TRUCK 1000 SERIES

ALL DIMENSIONS SHOWN FOR CHEVY
BASE MODEL UNLESS OTHERWISE NOTED

SUV 06 / TRUCK 1000 SERIES

26SEP2013 AWIND

( ) = INCHES

ANC22057.4

Full Size C/K Utilities

Overall Height C/K 100 (06) – Roof Rack

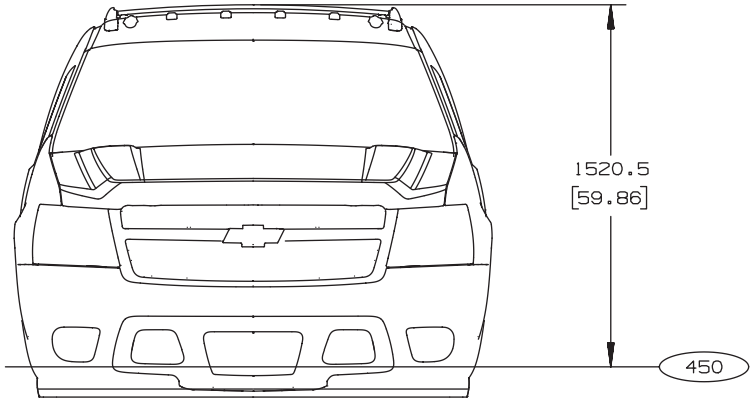

CHEVY SHOWN / GMC SAME AS CHEVY

06

[ ] = INCHES

ANC24426.3

Full Size C/K Utilities

Seating Positions and H Points 1st Row Front View, Utilities – C/K 150 (06)

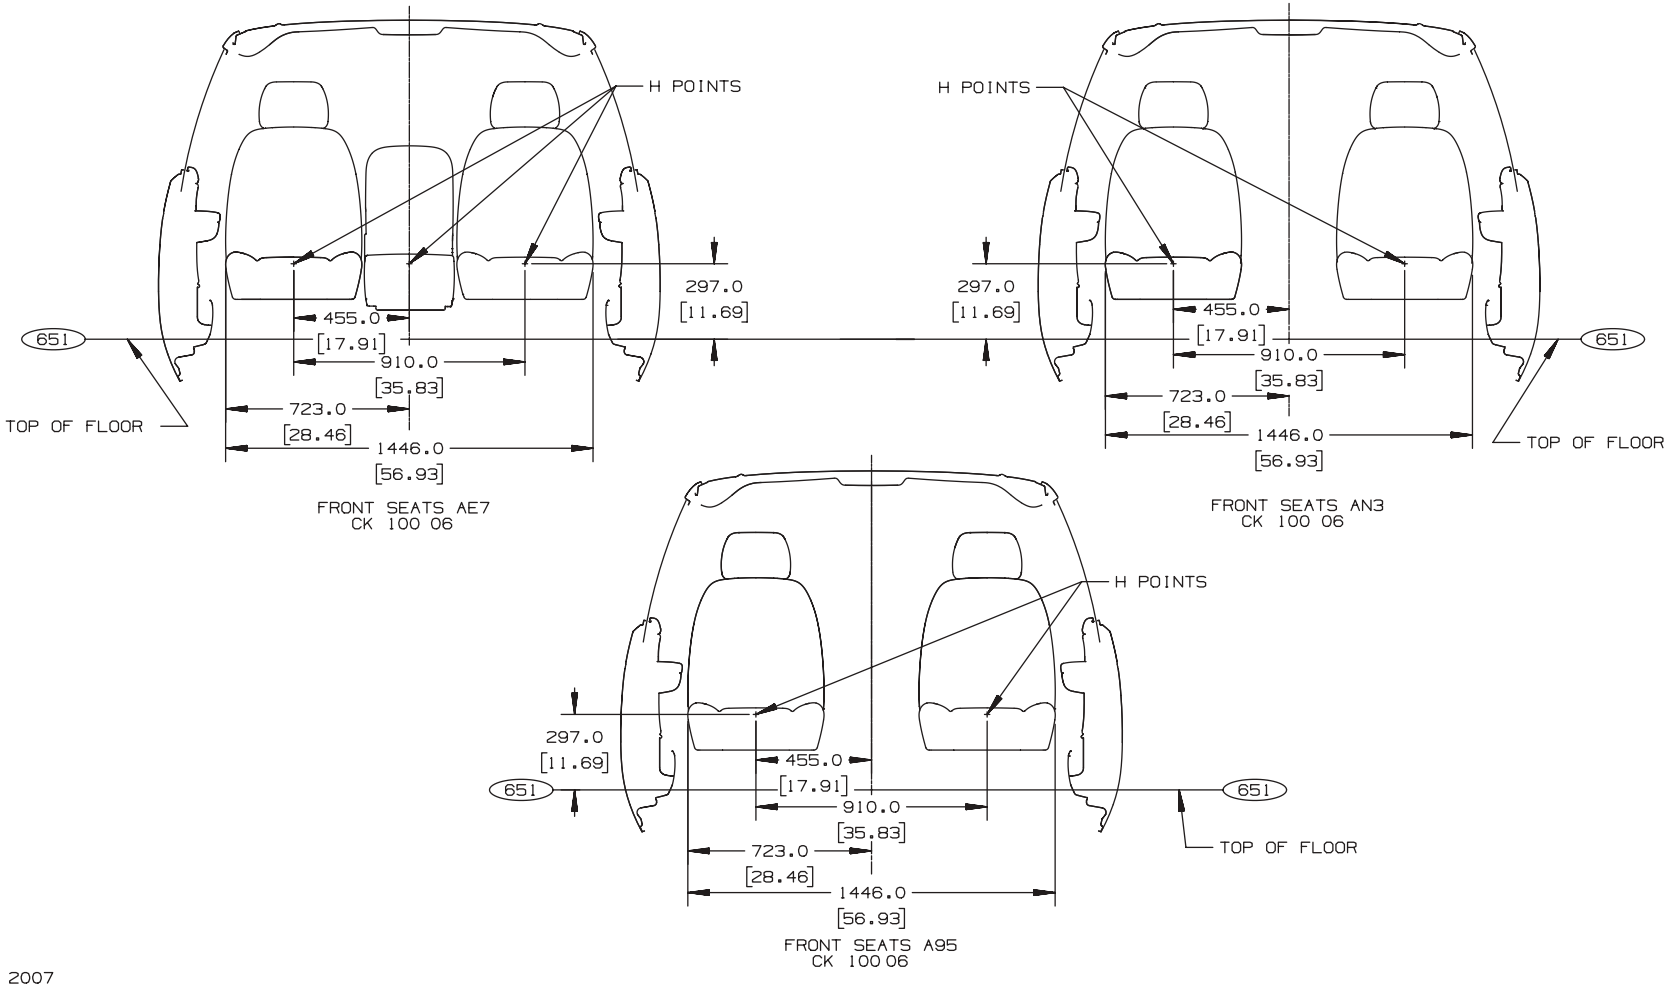

ANC32358.6

Full Size C/K Utilities

Seating Positions and H Points 2nd Row Front View, Utilities – C/K 150 (06)

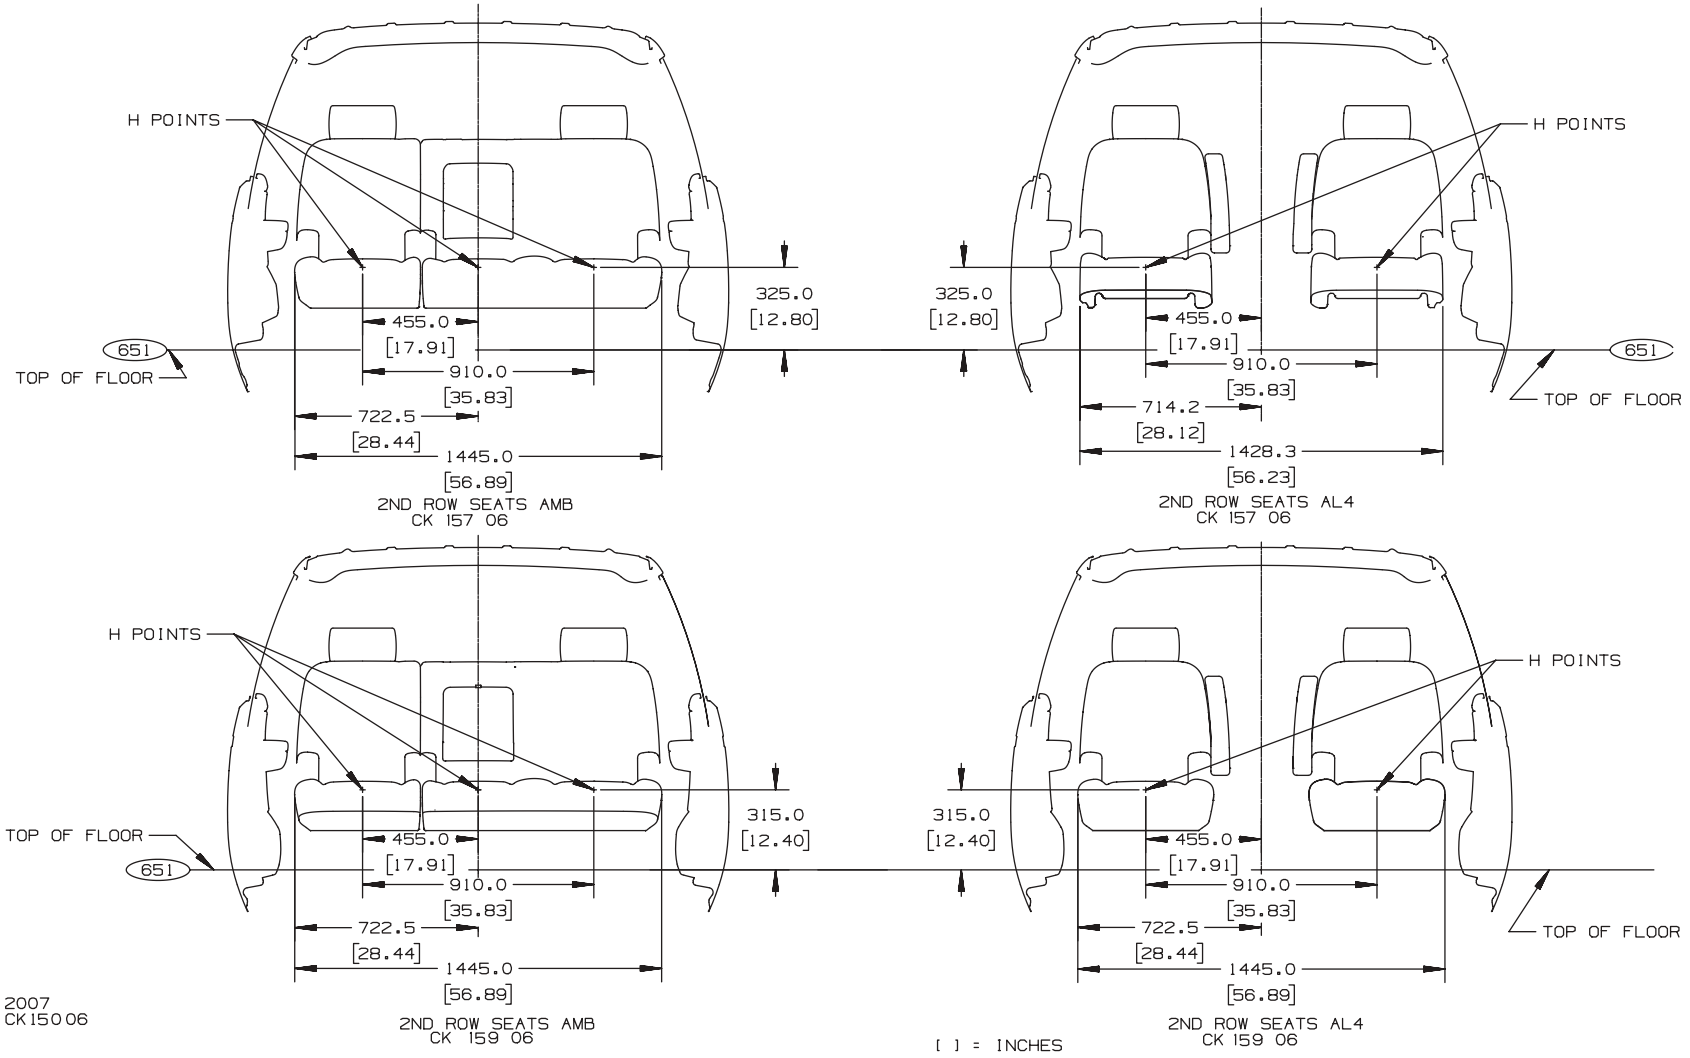

ANC32358.7

Full Size C/K Utilities

Seating Positions and H Points 3rd Row Front View, Utilities – C/K 150 (06)

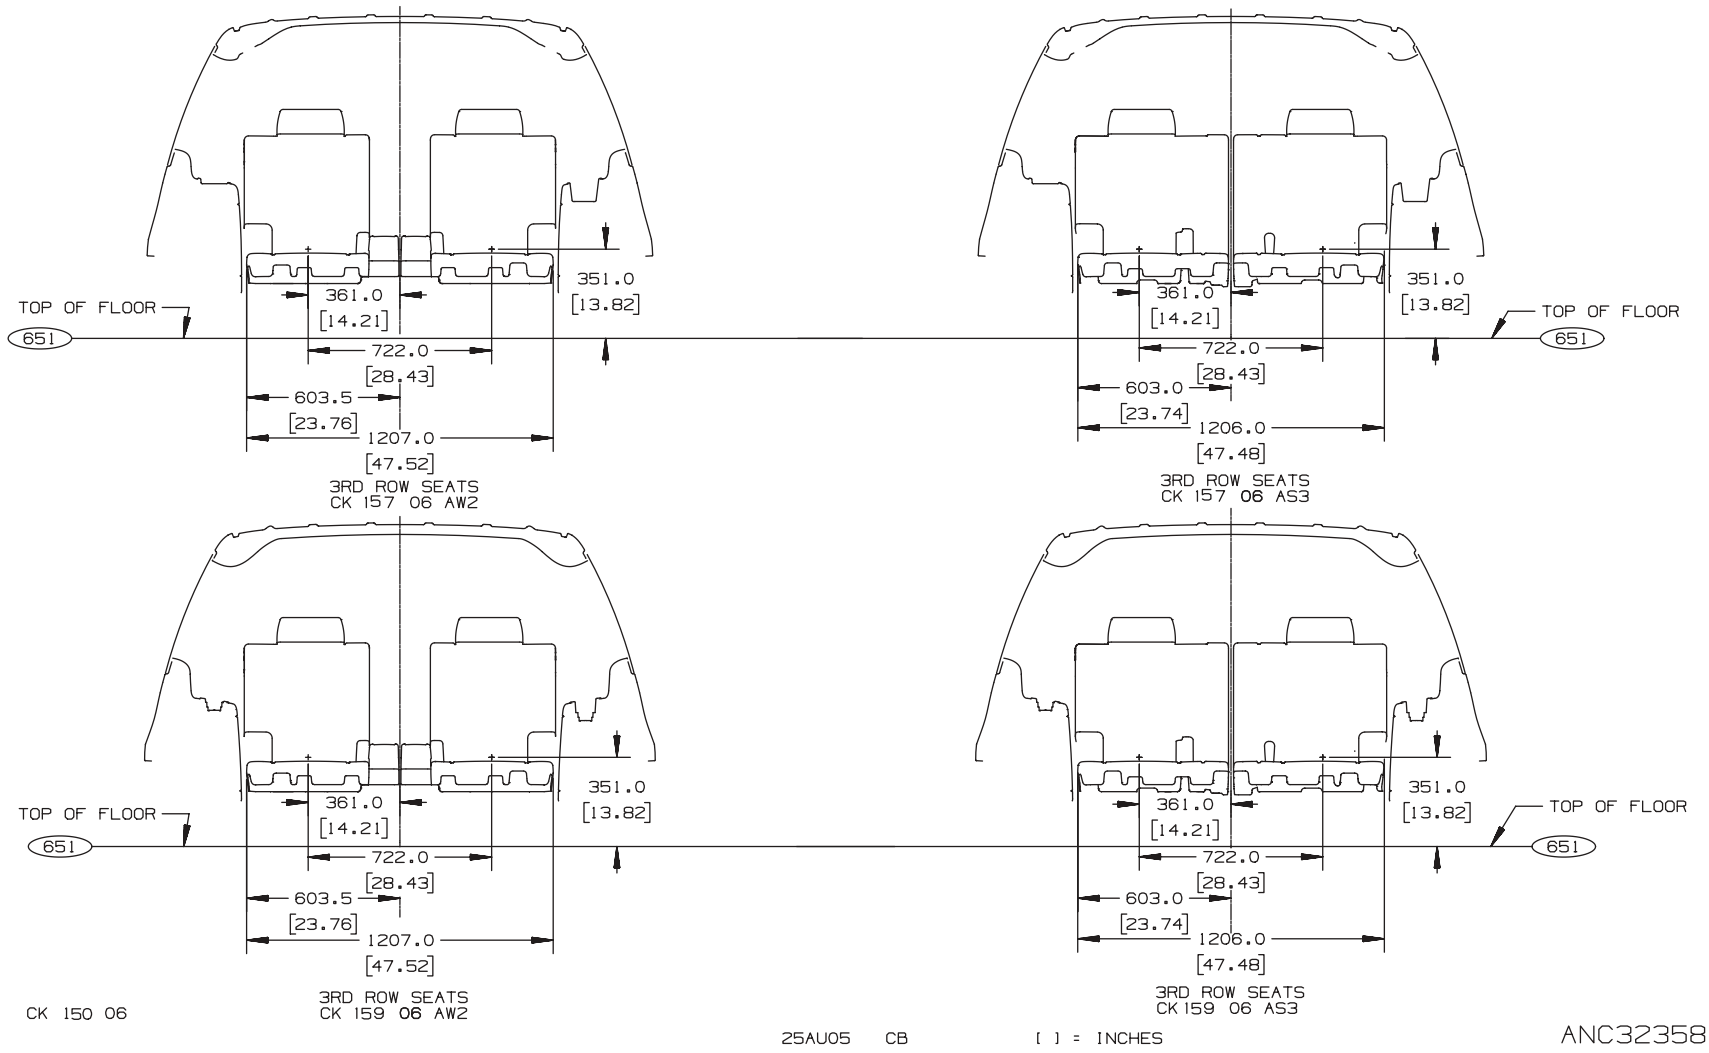

ANC32358.8

Full Size C/K Utilities

Seating Positions and H Points Side View, Utilities – C/K 150 (06)

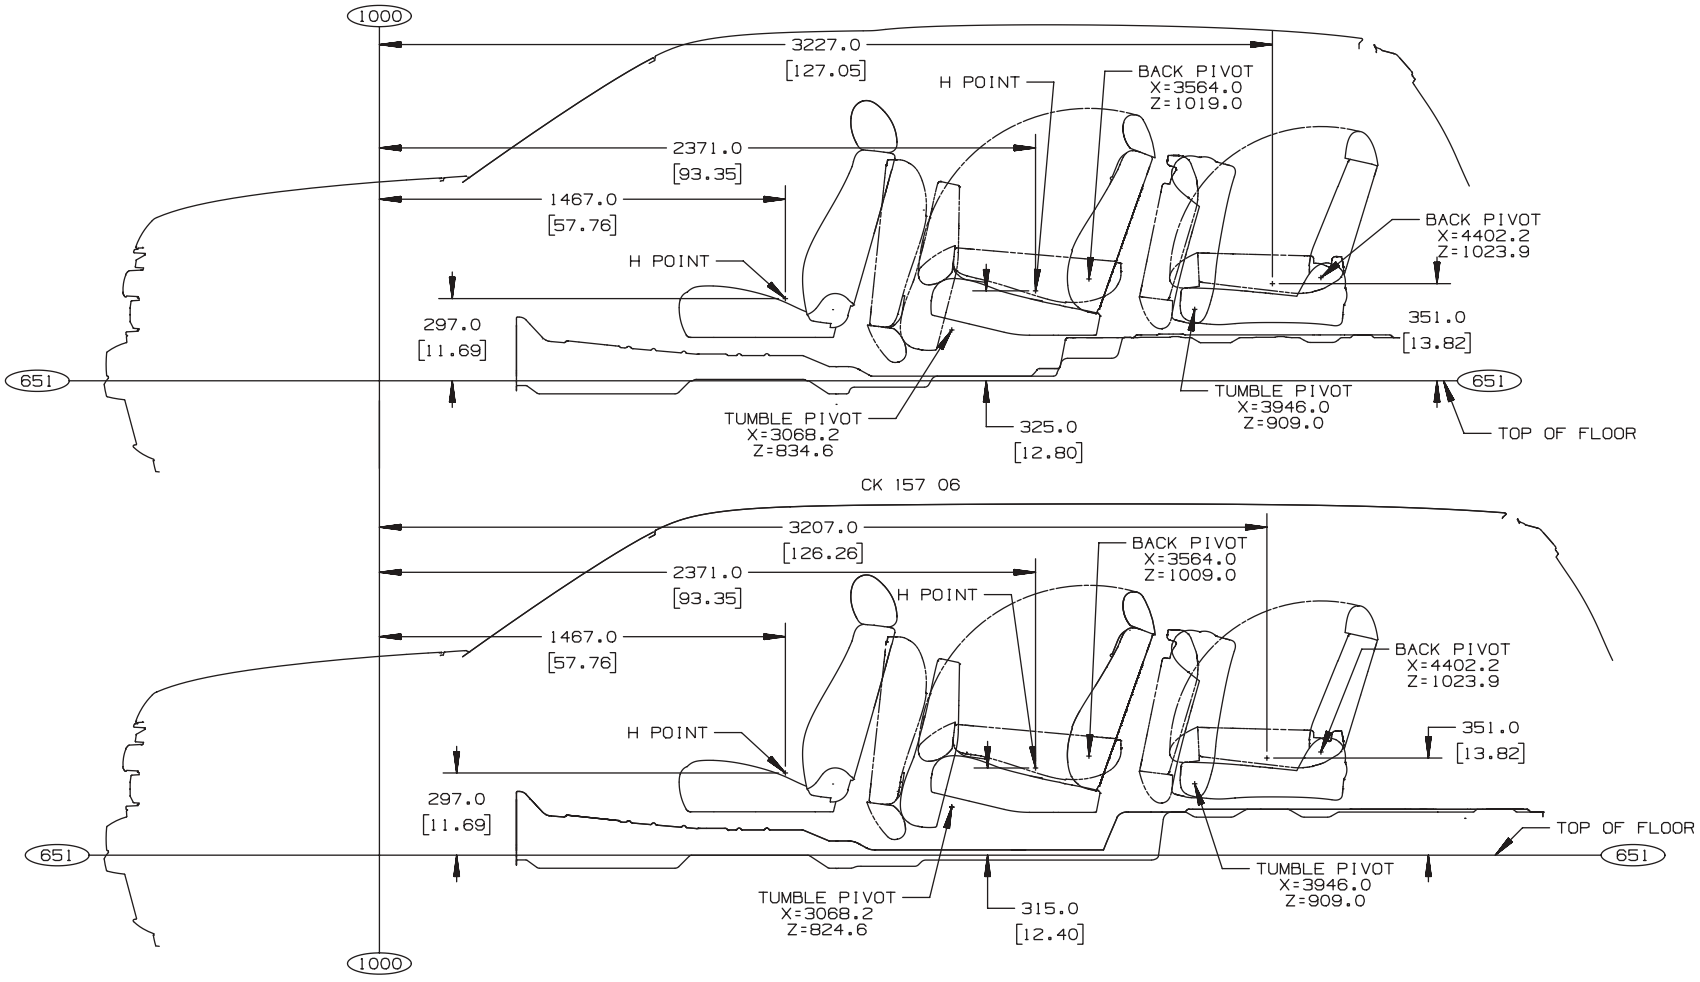

ANC32358.9

Full Size C/K Utilities

C/K 15706 1st and 2nd Rows – Seat Mounting Holes Locations – Floor

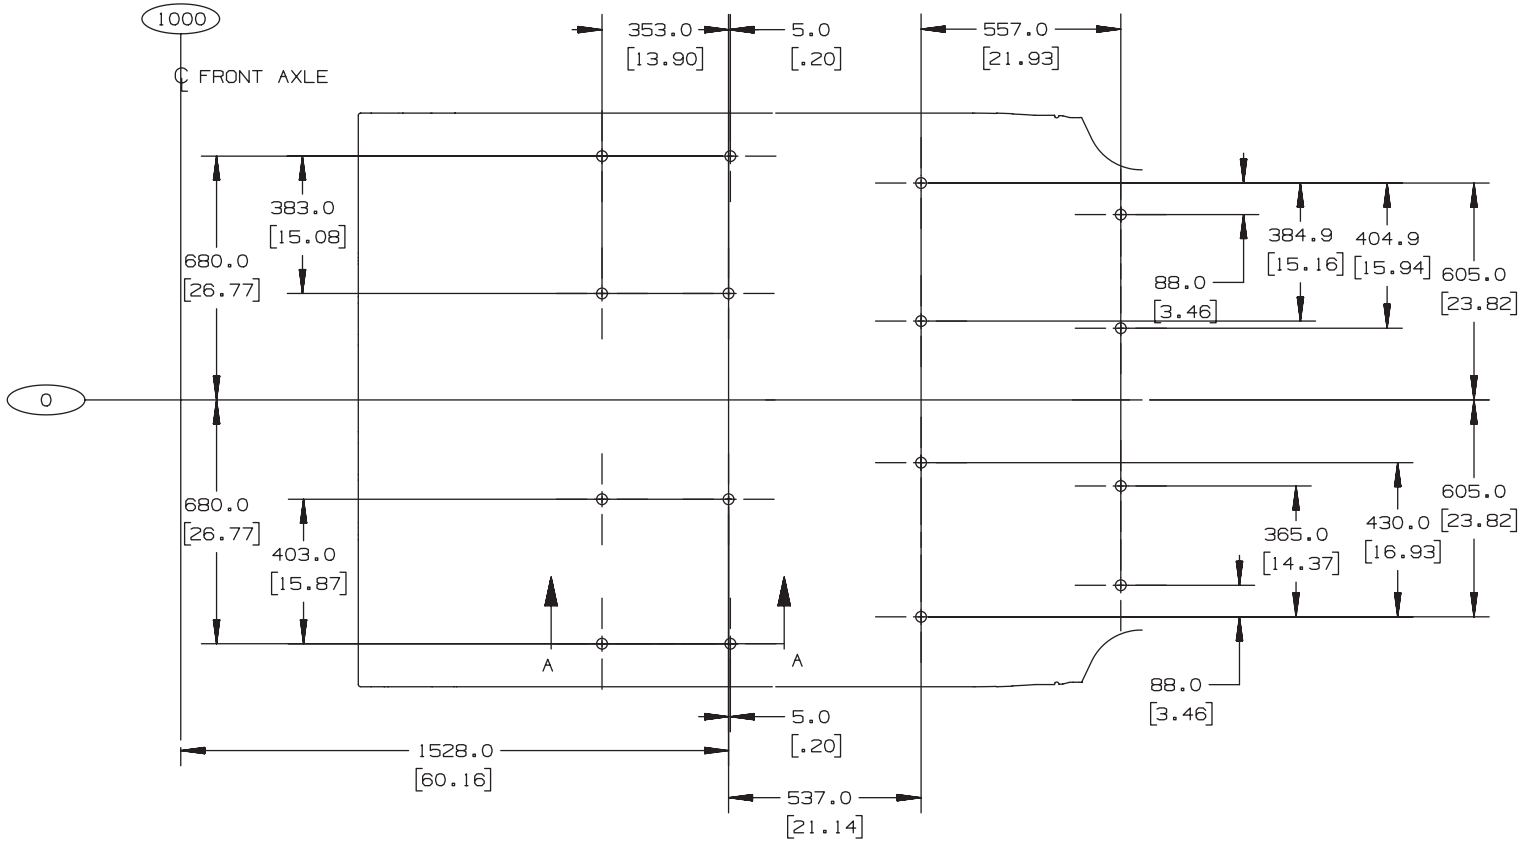

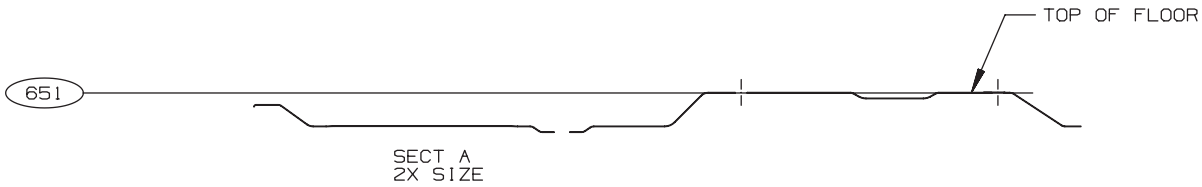

C/K 157 06 SEAT MOUNT LOCATIONS

15MR05 MK

[ ]= INCHES

ANB49071.3

Full Size C/K Utilities

C/K 15706 1st and 3rd Rows – Seat Mounting Holes Locations – Floor

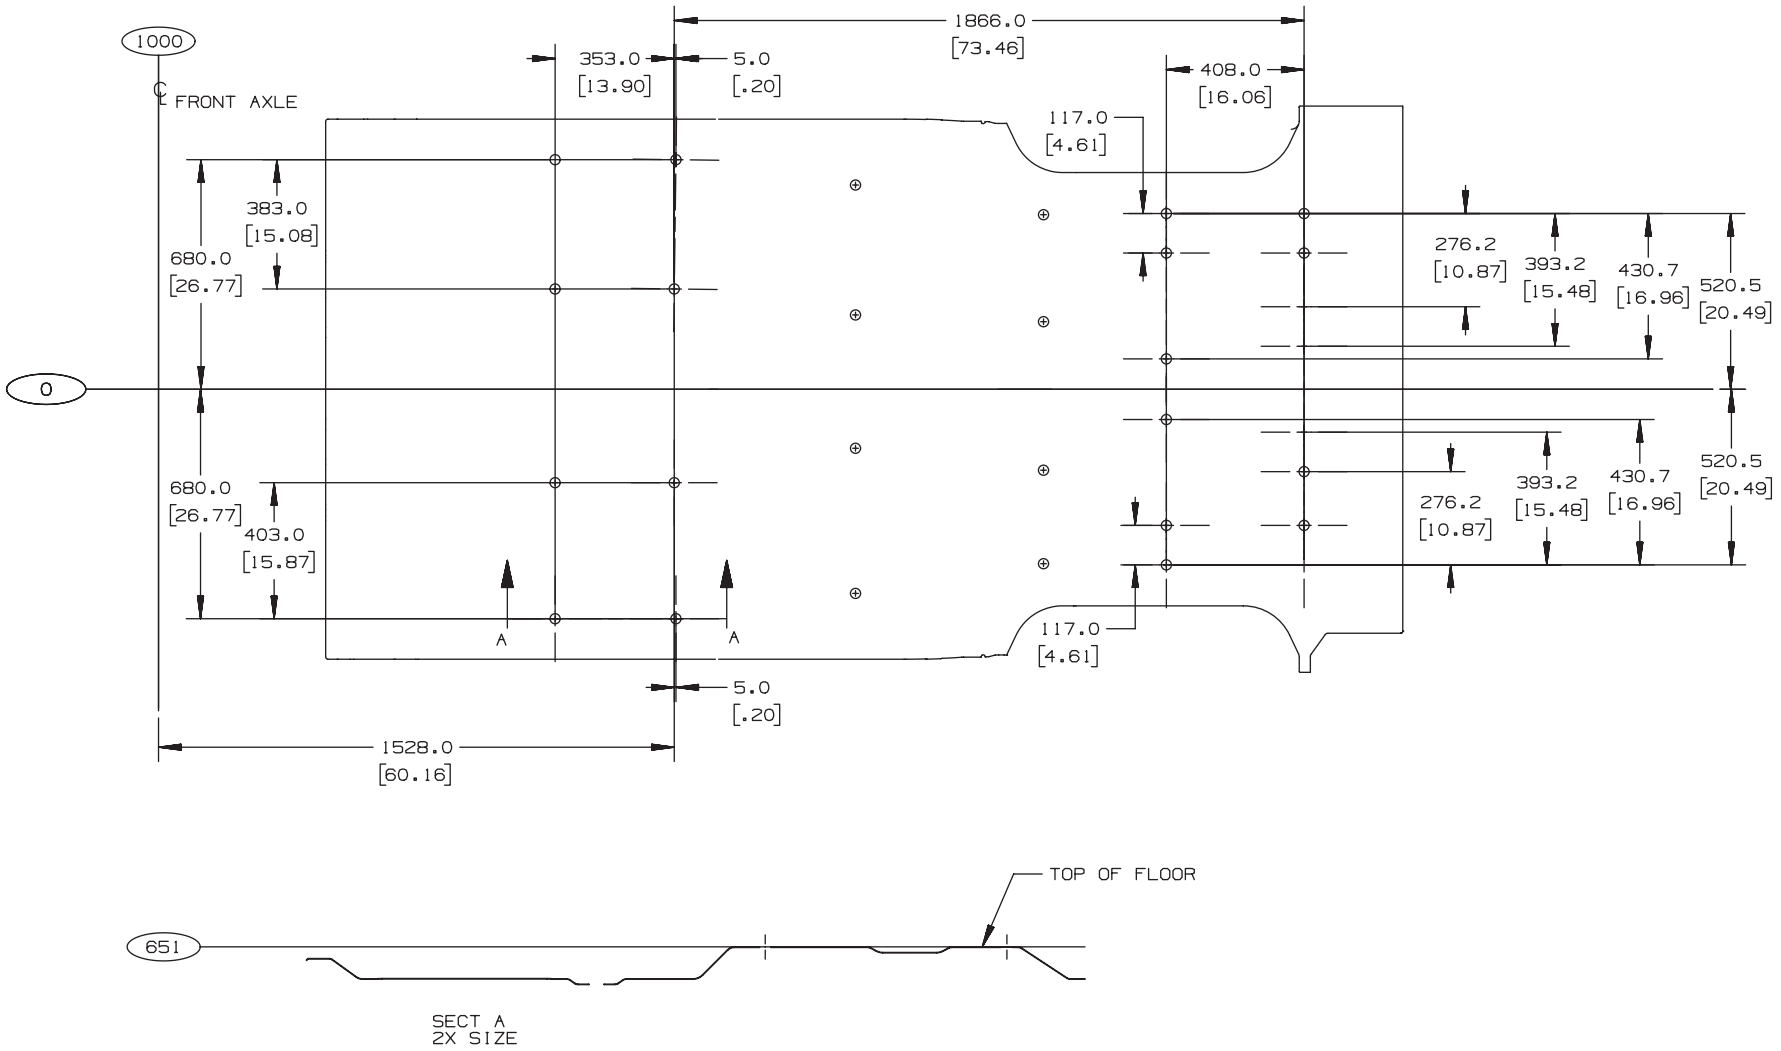

ANB49071.4

Full Size C/K Utilities

C/K 15 906 1st, 2nd and 3rd Rows – Seat Mounting Holes Locations – Floor

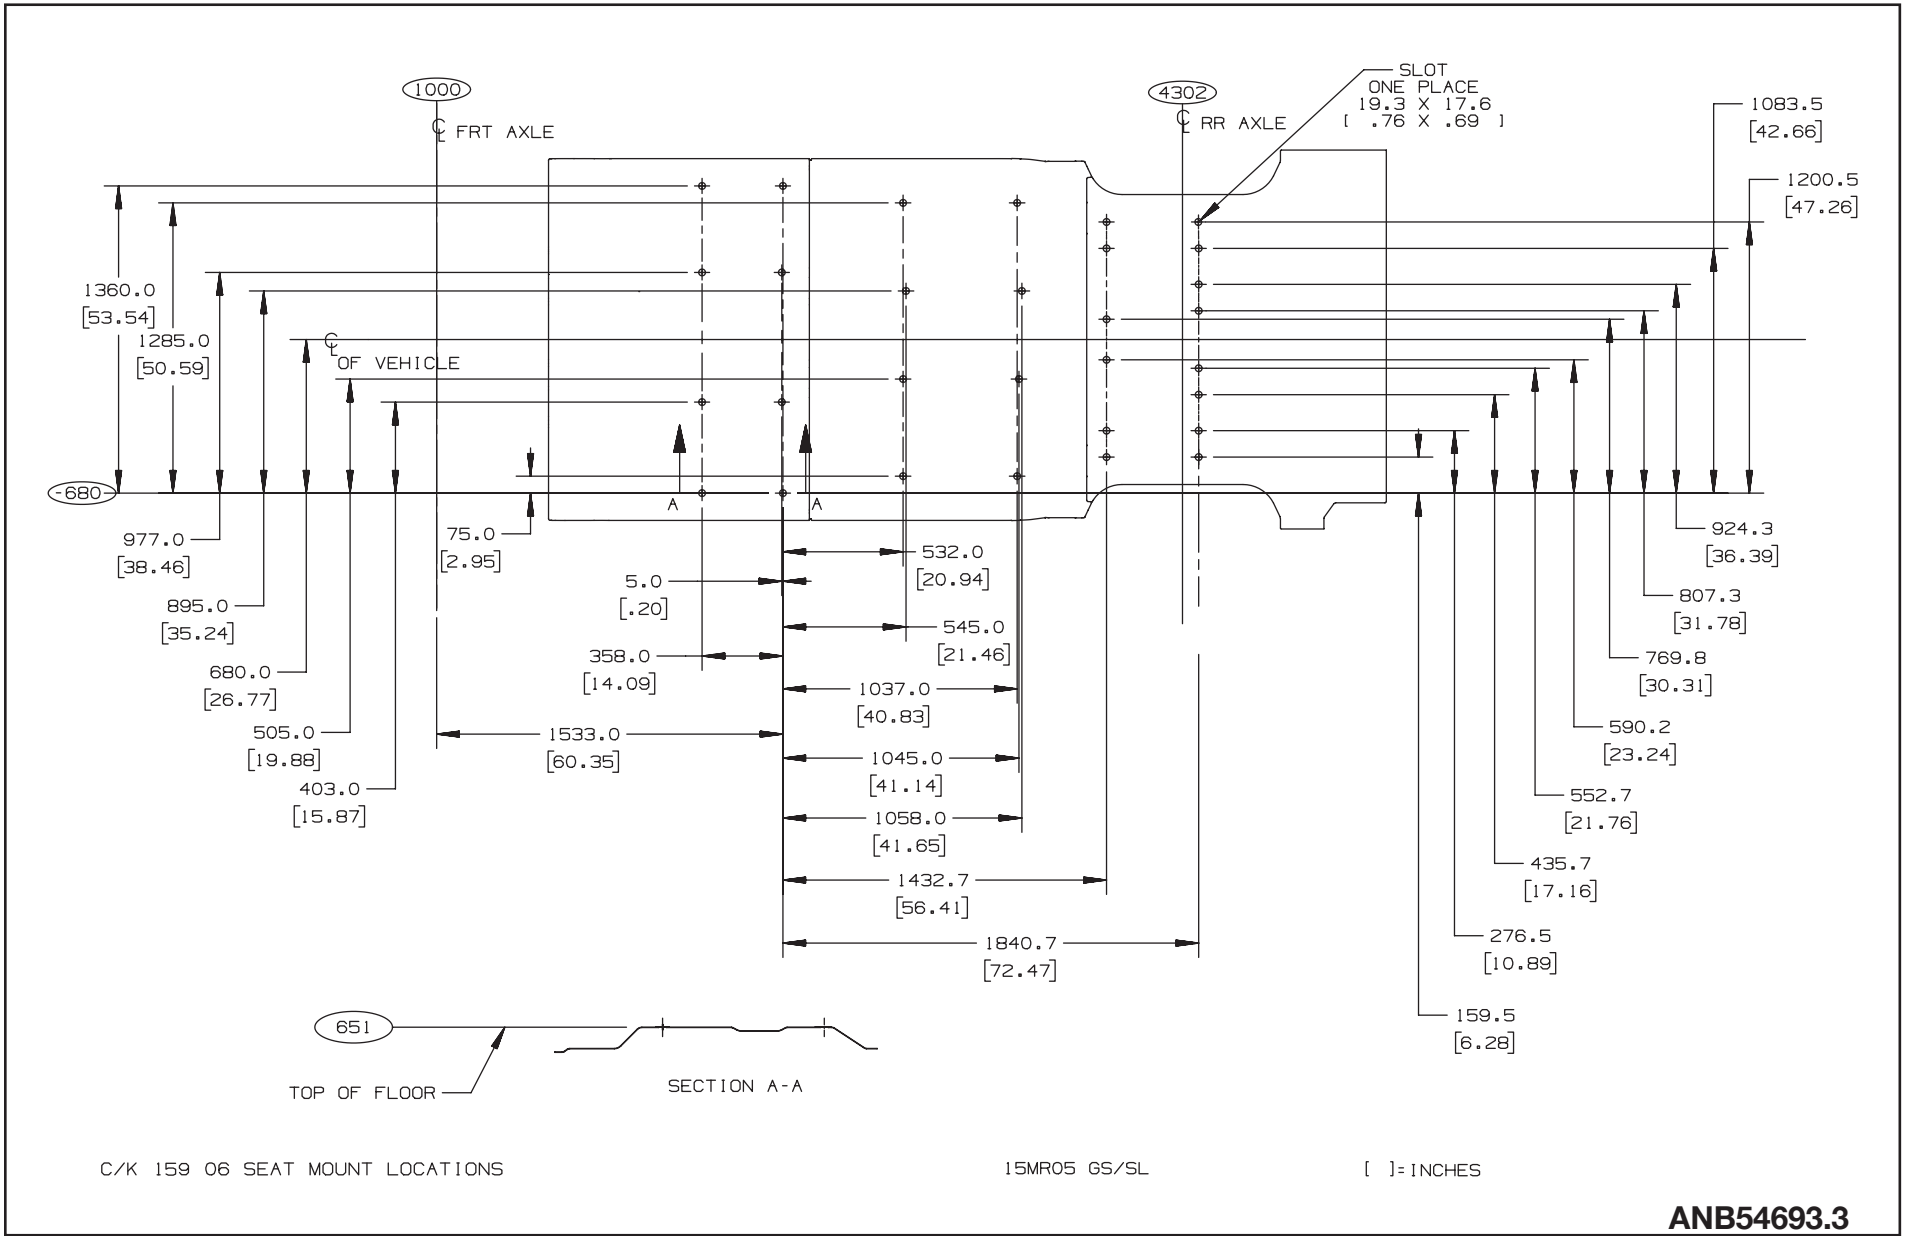

ANB54693.3

Full Size C/K Utilities

C/K 150 (00) – Datum Hole Location

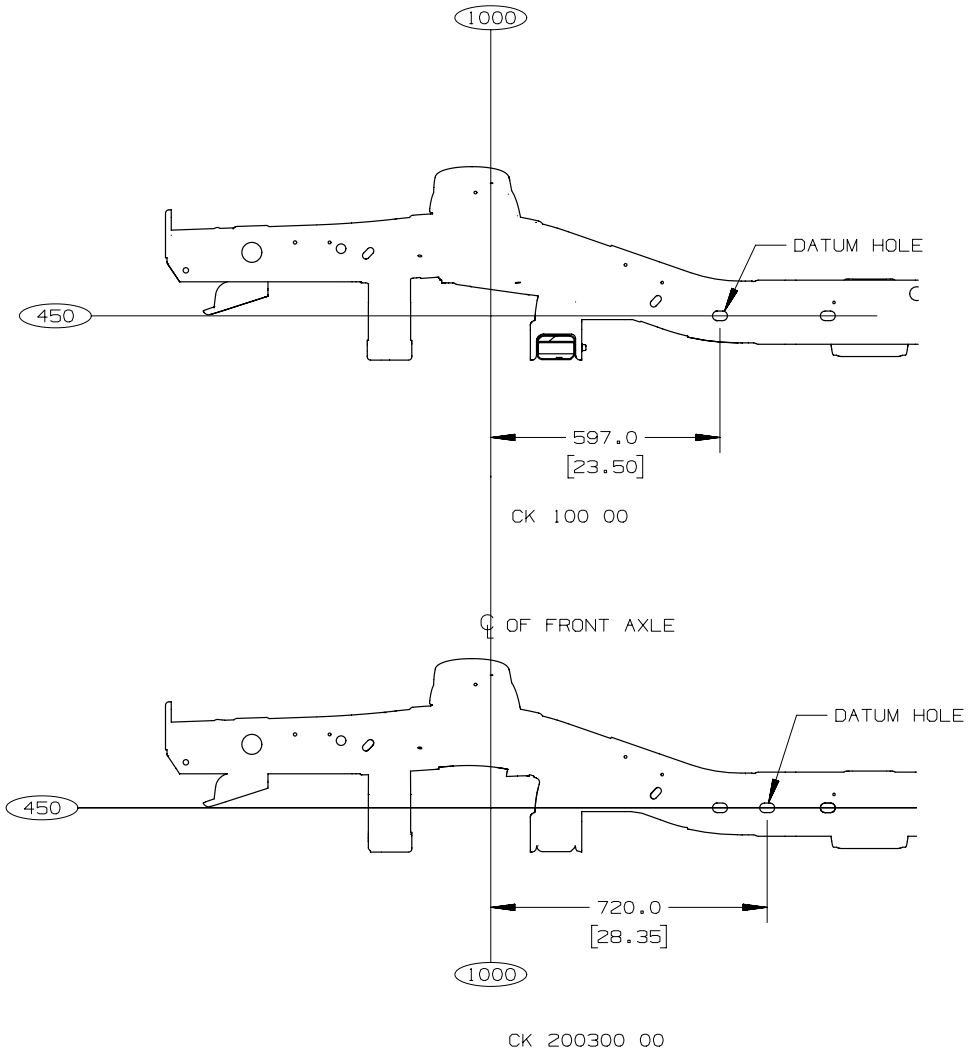

CK150 FRAME DATUM LOCATIONS 11AU05 CB [ ] = INCHES ANC30752.3

Full Size C/K Utilities

C/K 15706 – Frame Rail and Crossmember Locations

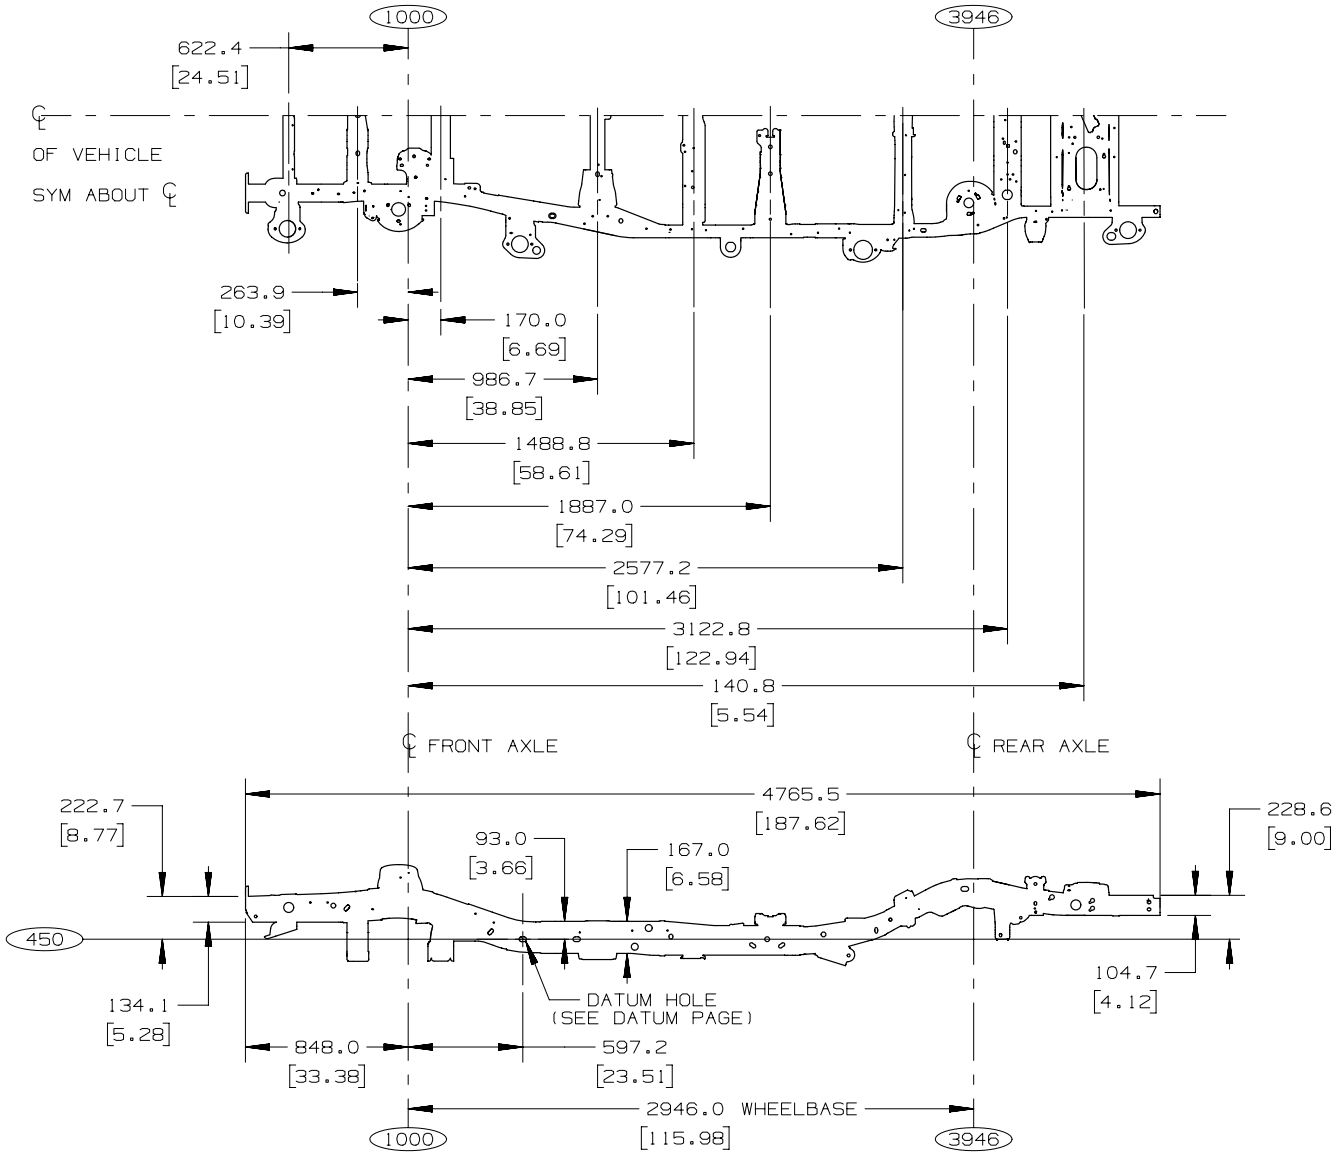

Full Size C/K Utilities

C/K 159 (06) – Frame Rail and Crossmember Locations

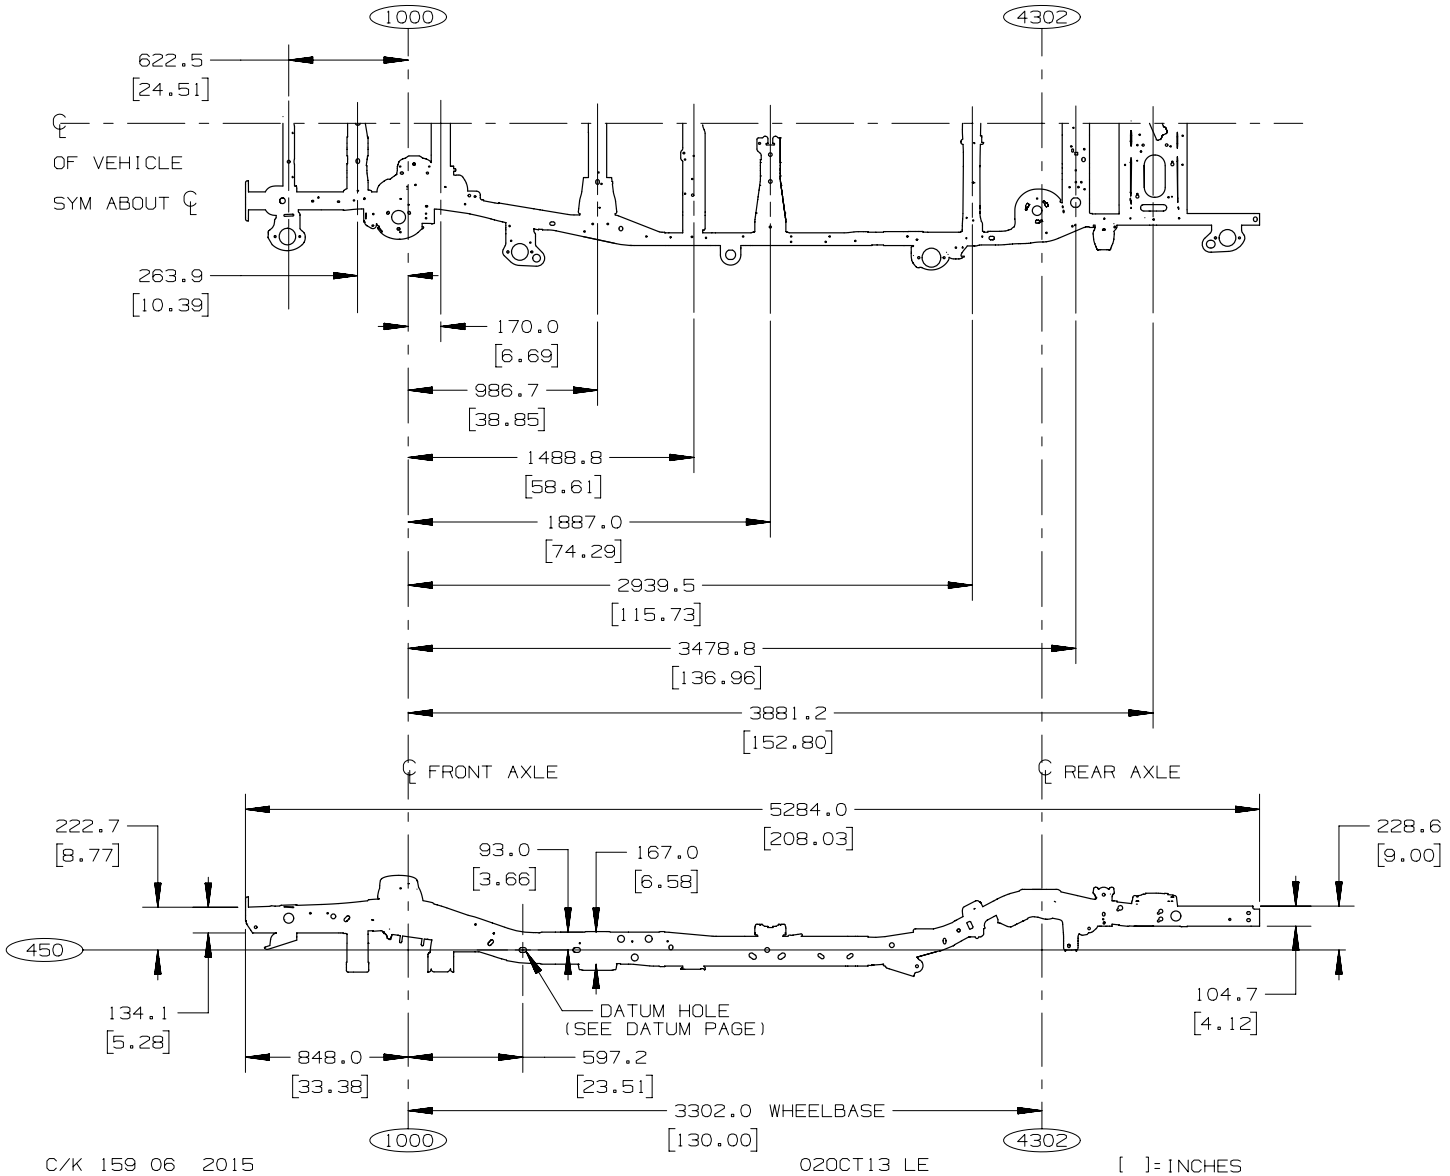

Full Size C/K Utilities

Spare Tire Location

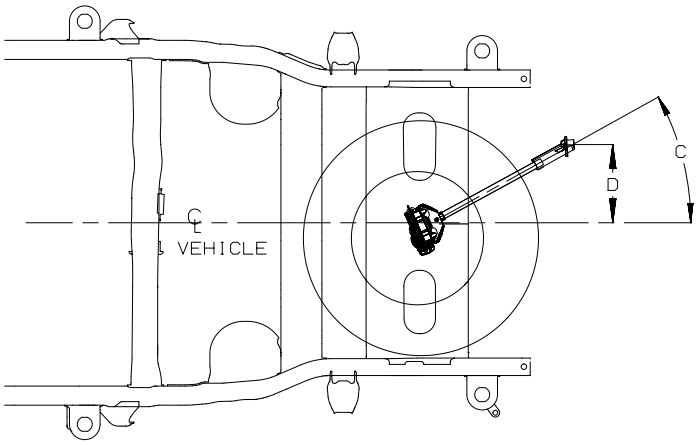

MODEL	TIRE	A	B	C	D	E	F
CK15706	P265/70R17	915.5 [36.04]	88.0 [3.46]	28.6°	263.0 [10.35]	1123.0 [44.21]	185.6 [7.31]
CK15906	P265/70R17	941.8 [37.08]	135.0 [5.32]	22.5°	271.6 [10.69]	1284.4 [50.57]	185.6 [7.31]

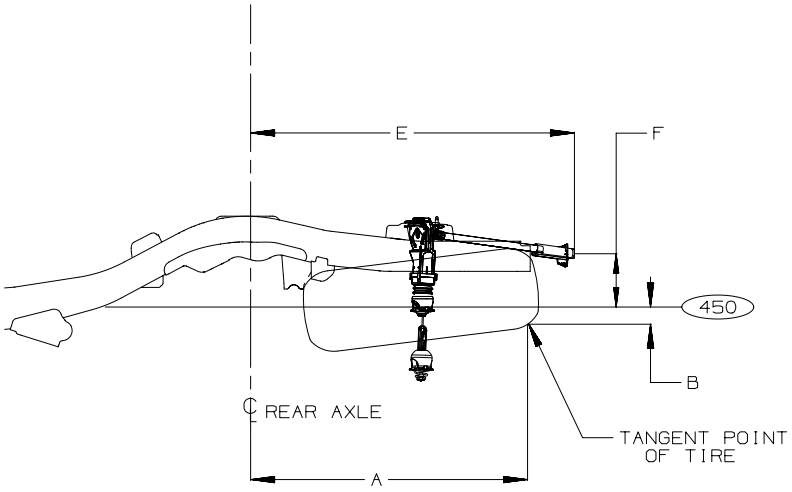

2015 SPARE TIRE UTILITIES

310C05 SW [ ]= INCHES

ANC39360.3

Full Size C/K Utilities

Utilities C/K 150 (06) – Platform Hitch

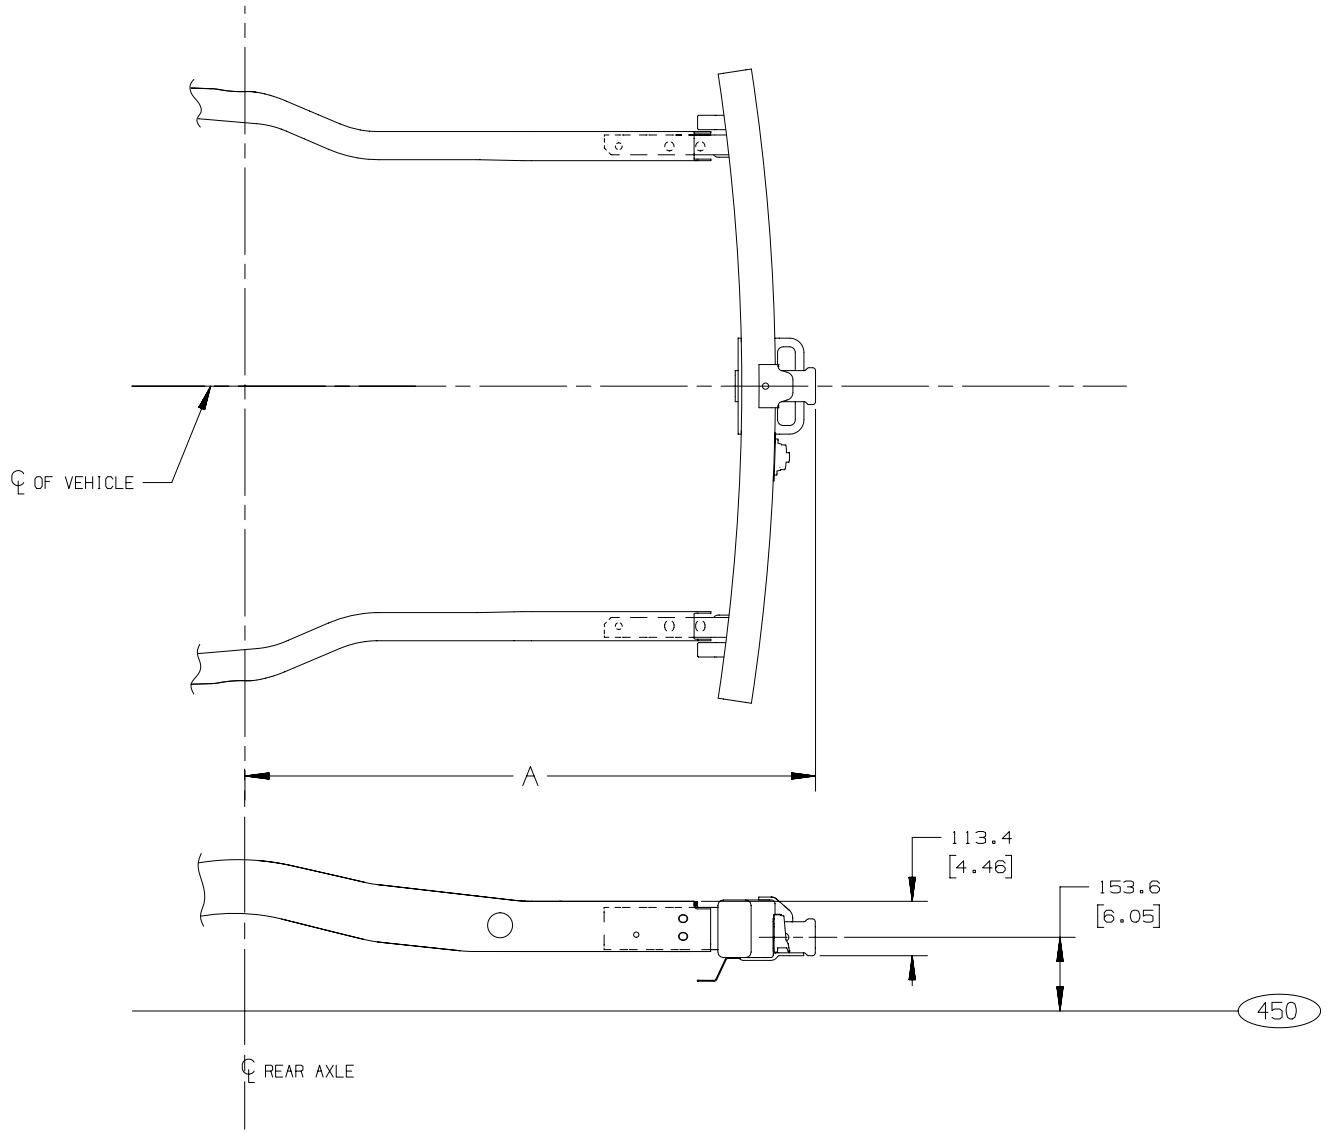

MODEL	℄ REAR AXLE	DIM "A"
C 157 06	3946	1189.2
C 159 06	4302	1352.1

C/K 150 06 2015 24MY05 SL [ ]=INCHES ANB60845.3

Full Size C/K Utilities

Front Axle/Tire Data Chart – C/K15 (706/906)

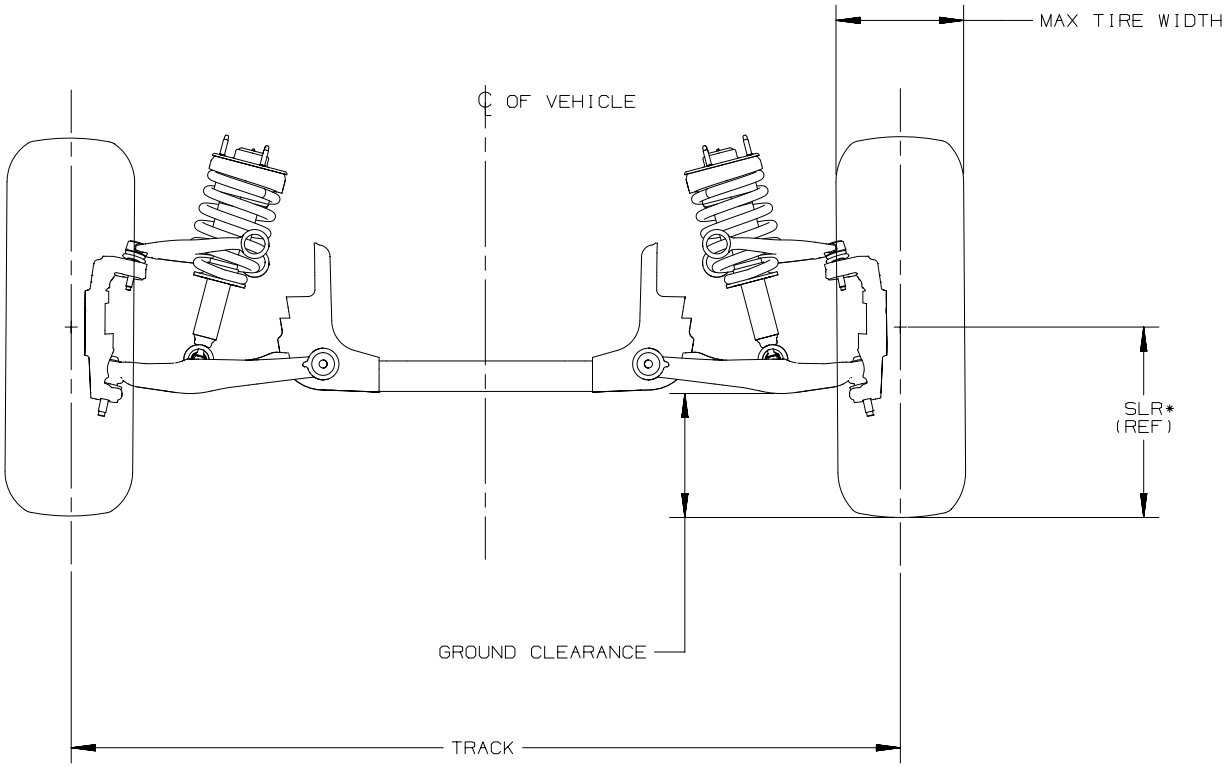

VYU = SNOW PLOW
Z83 = CHASSIS PACKAGE SOLID SMOOTH RIDE
Z85 = CHASSIS PACKAGE INCREASED CAPACITY
E63 = BODY EQUIPMENT FLEETSIDE PICKUP BOX
Z71 = CHASSIS PACKAGE OFF ROAD
ZW7 = CHASSIS PACKAGE PREMIUM SMOOTH RIDE

*MINIMUM GROUND CLEARANCE TO BE CALCULATED BY USING GROSS AXLE WEIGHT AND RECOMMENDED TIRE PRESURE

UTILITIES 1000 SERIES/TRUCK 1000 SERIES FRONT AXLE/TIRE DATA (2015) 12FE07 ML [ ]=INCHES ANB46140.13

Full Size C/K Utilities

Front Axle/Tire Data Chart – C/K15 (706/906)

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	MAX TIRE WIDTH	GROUND CLEARANCE
K15706	ZW7/Z55/Z56/Z71	366	P265/65R18	7100	SINGLE	1725.6	28.0	286.0	210.2
C15706	ZW7/Z55/Z56/Z71	368	P265/65R18	7000	SINGLE	1725.6	28.0	286.0	211.8
K15706	ZW7/Z55/Z56/Z71	368	P265/65R18	7300	SINGLE	1725.6	28.0	286.0	213.0
CK15706	ZW7/Z55/Z56/Z71	371	P265/65R18	7100	SINGLE	1725.6	28.0	286.0	223.0
K15706	ZW7/Z55/Z56/Z71	365	P265/70R17	7300	SINGLE	1725.6	28.0	281.0	206.0
CK15706	ZW7/Z55/Z56/Z71	368	P265/70R17	7100	SINGLE	1725.6	28.0	281.0	206.5
CK15706	ZW7/Z55/Z56/Z71	376	P275/55R20	7100	SINGLE	1725.6	28.0	298.0	216.5
K15706	ZW7/Z55/Z56/Z71	373	P275/55R20	7300	SINGLE	1725.6	28.0	298.0	214.4
CK15706	ZW7/Z55/Z56/Z71	376	P275/55R20	7100	SINGLE	1725.6	28.0	298.0	214.6
K15706	ZW7/Z55/Z56/Z71	373	P275/55R20	7300	SINGLE	1725.6	28.0	298.0	213.7
CK15706	ZW7/Z55/Z56/Z71	379	P285/45R22	7000	SINGLE	1725.6	28.0	294.0	222.2
K15906	ZW7/Z55/Z56/Z71	376	P285/45R22	7400	SINGLE	1725.6	28.0	294.0	220.5
K15906	ZW7/Z55/Z56/Z71	373	P275/55R20	7400	SINGLE	1725.6	28.0	298.0	213.3
C15906	ZW7/Z55/Z56/Z71	375	P275/55R20	7200	SINGLE	1725.6	28.0	298.0	375.4
K15906	ZW7/Z55/Z56/Z71	365	P265/70R17	7400	SINGLE	1725.6	28.0	281.0	201.8
C15906	ZW7/Z55/Z56/Z71	368	P265/70R17	7200	SINGLE	1725.6	28.0	281.0	206.5
K15906	ZW7/Z55/Z56/Z71	365	P265/65R18	7400	SINGLE	1725.6	28.0	286.0	215.4

UTILITIES 1000 SERIES FRONT AXLE/TIRE DATA (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.15

Full Size C/K Utilities

Rear Axle/Tire Data Drawing – C/K 150 (06)

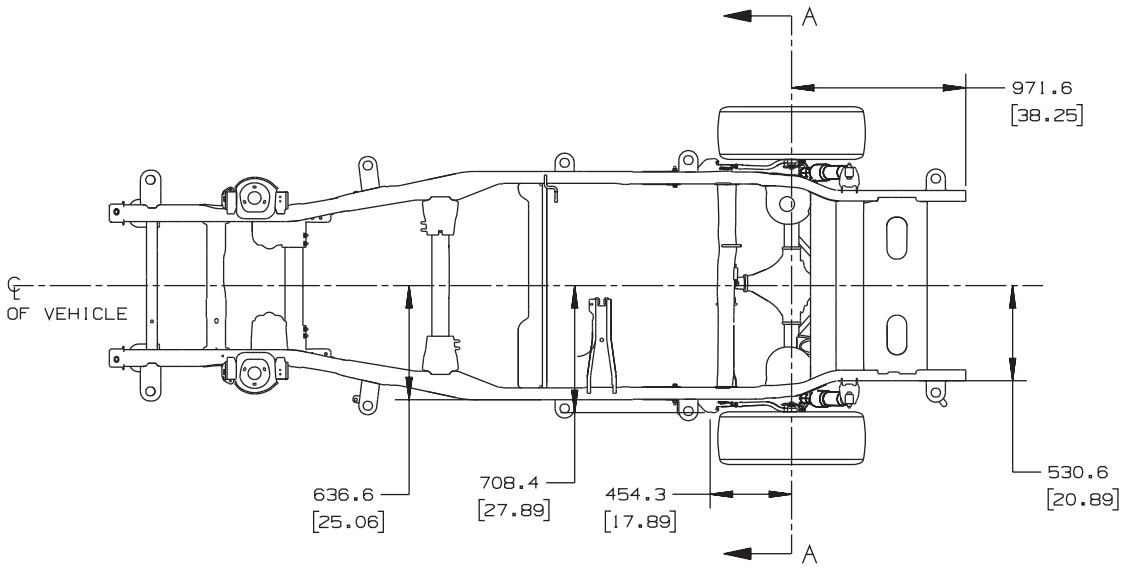

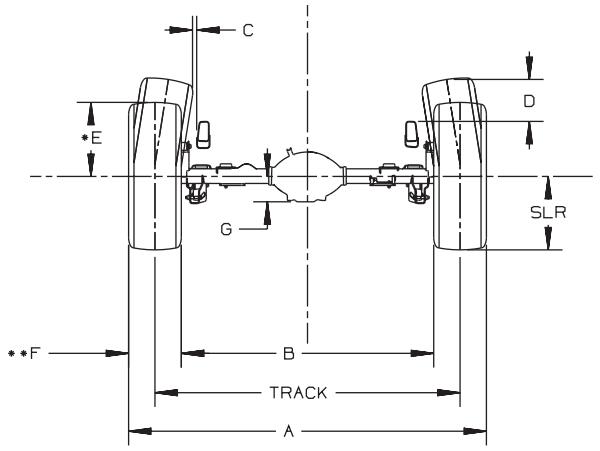

SECTION A-A
ROTATED 90

RING GEAR	G
[8.6] DIA	139.0 [5.47]
[9.5] DIA	160.0 [6.30]
[10.5] DIA	184.0 [7.24]

A = TRACK + F
B = TRACK - F

* MAX GROWN TIRE RADIUS ON NARROWEST RIM
** MAX GROWN TIRE WIDTH ON WIDEST RIM
TIRE CHAINS NOT INCLUDED

ZW7 = CHASSIS PACKAGE PREMIUM SMOOTH RIDE

Z71 = CHASSIS PACKAGE OFF ROAD

UTILITIES REAR AXLE/TIRE DATA (2007)

[ ]= INCHES

ANB46140.3

Full Size C/K Utilities

Rear Axle/Tire Data Chart – C/K 150 (06)

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	-A-	-B-	-C-	-D-	-E-	-F-
K15706	ZW7/Z55/Z56/Z71	361	P265/65R18	7100	SINGLE	1701.8	28.0	1986.9	1414.9	22.8	265.5	408.5	286.0
C15706	ZW7/Z55/Z56/Z71	361	P265/65R18	7000	SINGLE	1701.8	28.0	1986.9	1414.9	22.8	265.5	408.5	286.0
K15706	ZW7/Z55/Z56/Z71	363	P265/65R18	7300	SINGLE	1701.8	28.0	1986.9	1414.9	22.8	265.5	408.5	286.0
CK15706	ZW7/Z55/Z56/Z71	363	P265/65R18	7100	SINGLE	1701.8	28.0	1986.9	1414.9	22.8	265.5	408.5	286.0
K15706	ZW7/Z55/Z56/Z71	363	P265/70R17	7300	SINGLE	1701.8	28.0	1980.8	1418.8	25.9	264.8	410.0	281.0
CK15706	ZW7/Z55/Z56/Z71	360	P265/70R17	7100	SINGLE	1701.8	28.0	1980.8	1418.8	25.9	264.8	410.0	281.0
CK15706	ZW7/Z55/Z56/Z71	369	P275/55R20	7100	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
K15706	ZW7/Z55/Z56/Z71	369	P275/55R20	7300	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
CK15706	ZW7/Z55/Z56/Z71	369	P275/55R20	7100	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
K15706	ZW7/Z55/Z56/Z71	369	P275/55R20	7300	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
CK15706	ZW7/Z55/Z56/Z71	373	P285/45R22	7000	SINGLE	1701.8	28.0	1995.8	1407.8	15.9	264.3	413.9	294.0
K15906	ZW7/Z55/Z56/Z71	372	P285/45R22	7400	SINGLE	1701.8	28.0	1995.8	1407.8	15.9	264.3	413.9	294.0
K15906	ZW7/Z55/Z56/Z71	368	P275/55R20	7400	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
C15906	ZW7/Z55/Z56/Z71	369	P275/55R20	7200	SINGLE	1701.8	28.0	1999.0	1403.0	15.5	269.3	410.0	298.0
K15906	ZW7/Z55/Z56/Z71	360	P265/70R17	7400	SINGLE	1701.8	28.0	1908.8	1418.8	25.9	264.8	410.0	281.0
C15906	ZW7/Z55/Z56/Z71	360	P265/70R17	7200	SINGLE	1701.8	28.0	1908.8	1418.8	25.9	264.8	410.0	281.0
K15906	ZW7/Z55/Z56/Z71	360	P265/65R18	7400	SINGLE	1701.8	28.0	1986.9	1414.9	22.8	265.5	408.5	286.0

UTILITIES REAR AXLE/TIRE DATA (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.4

Full Size C/K Utilities

C/K 15706 – Fuel Systems

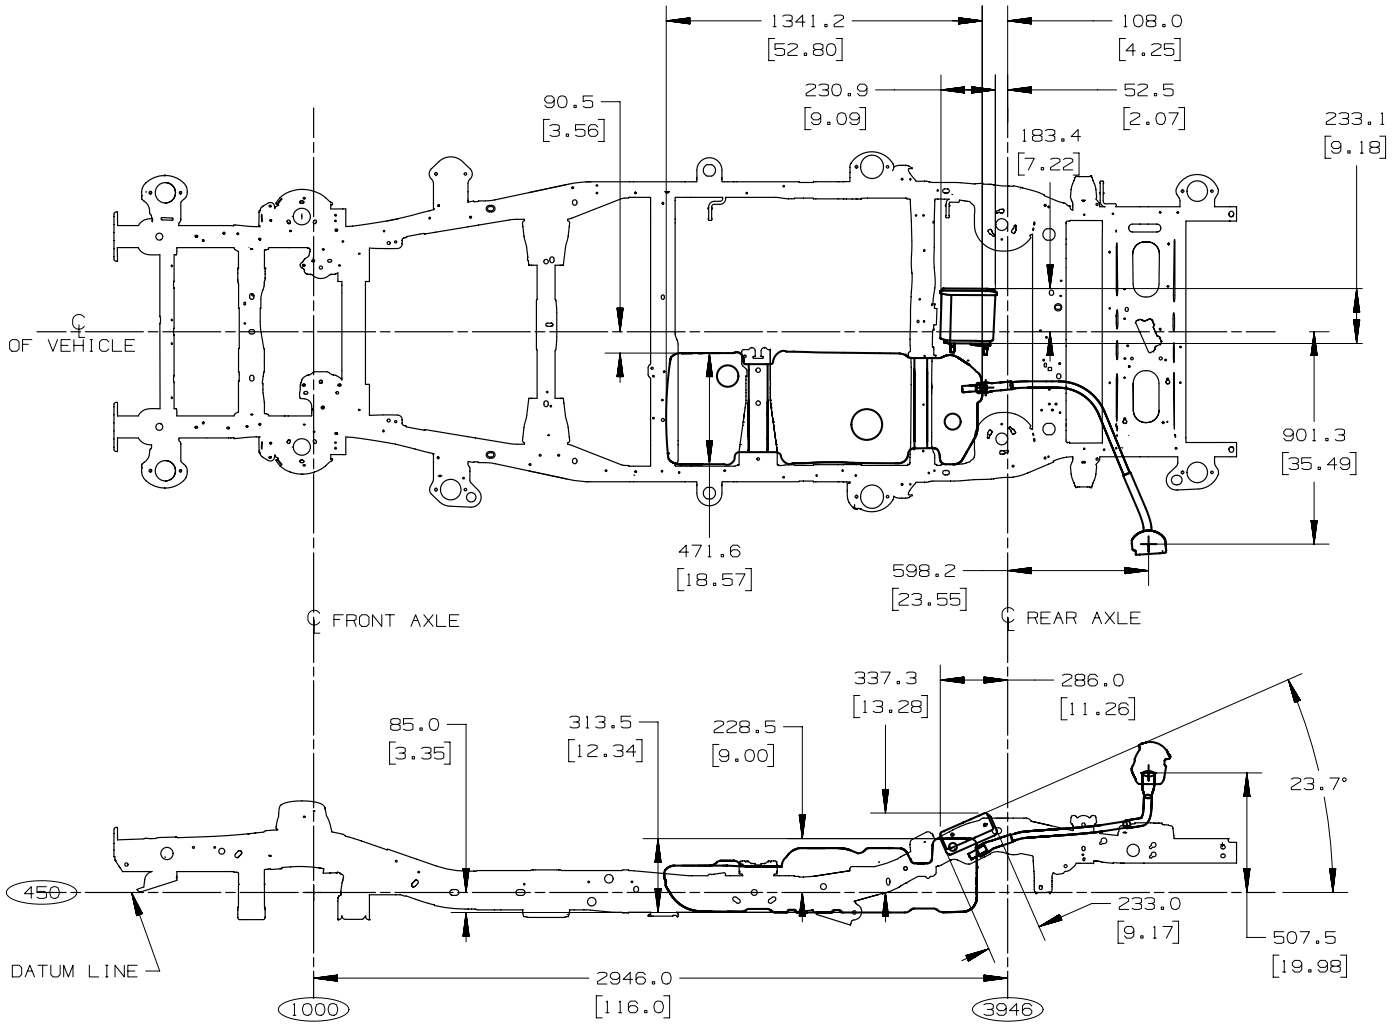

FUEL TANK CK15706 2015 020CT13 LE [ ]=INCHES ANB49354.3

Full Size C/K Utilities

C/K 15906 – Fuel Systems

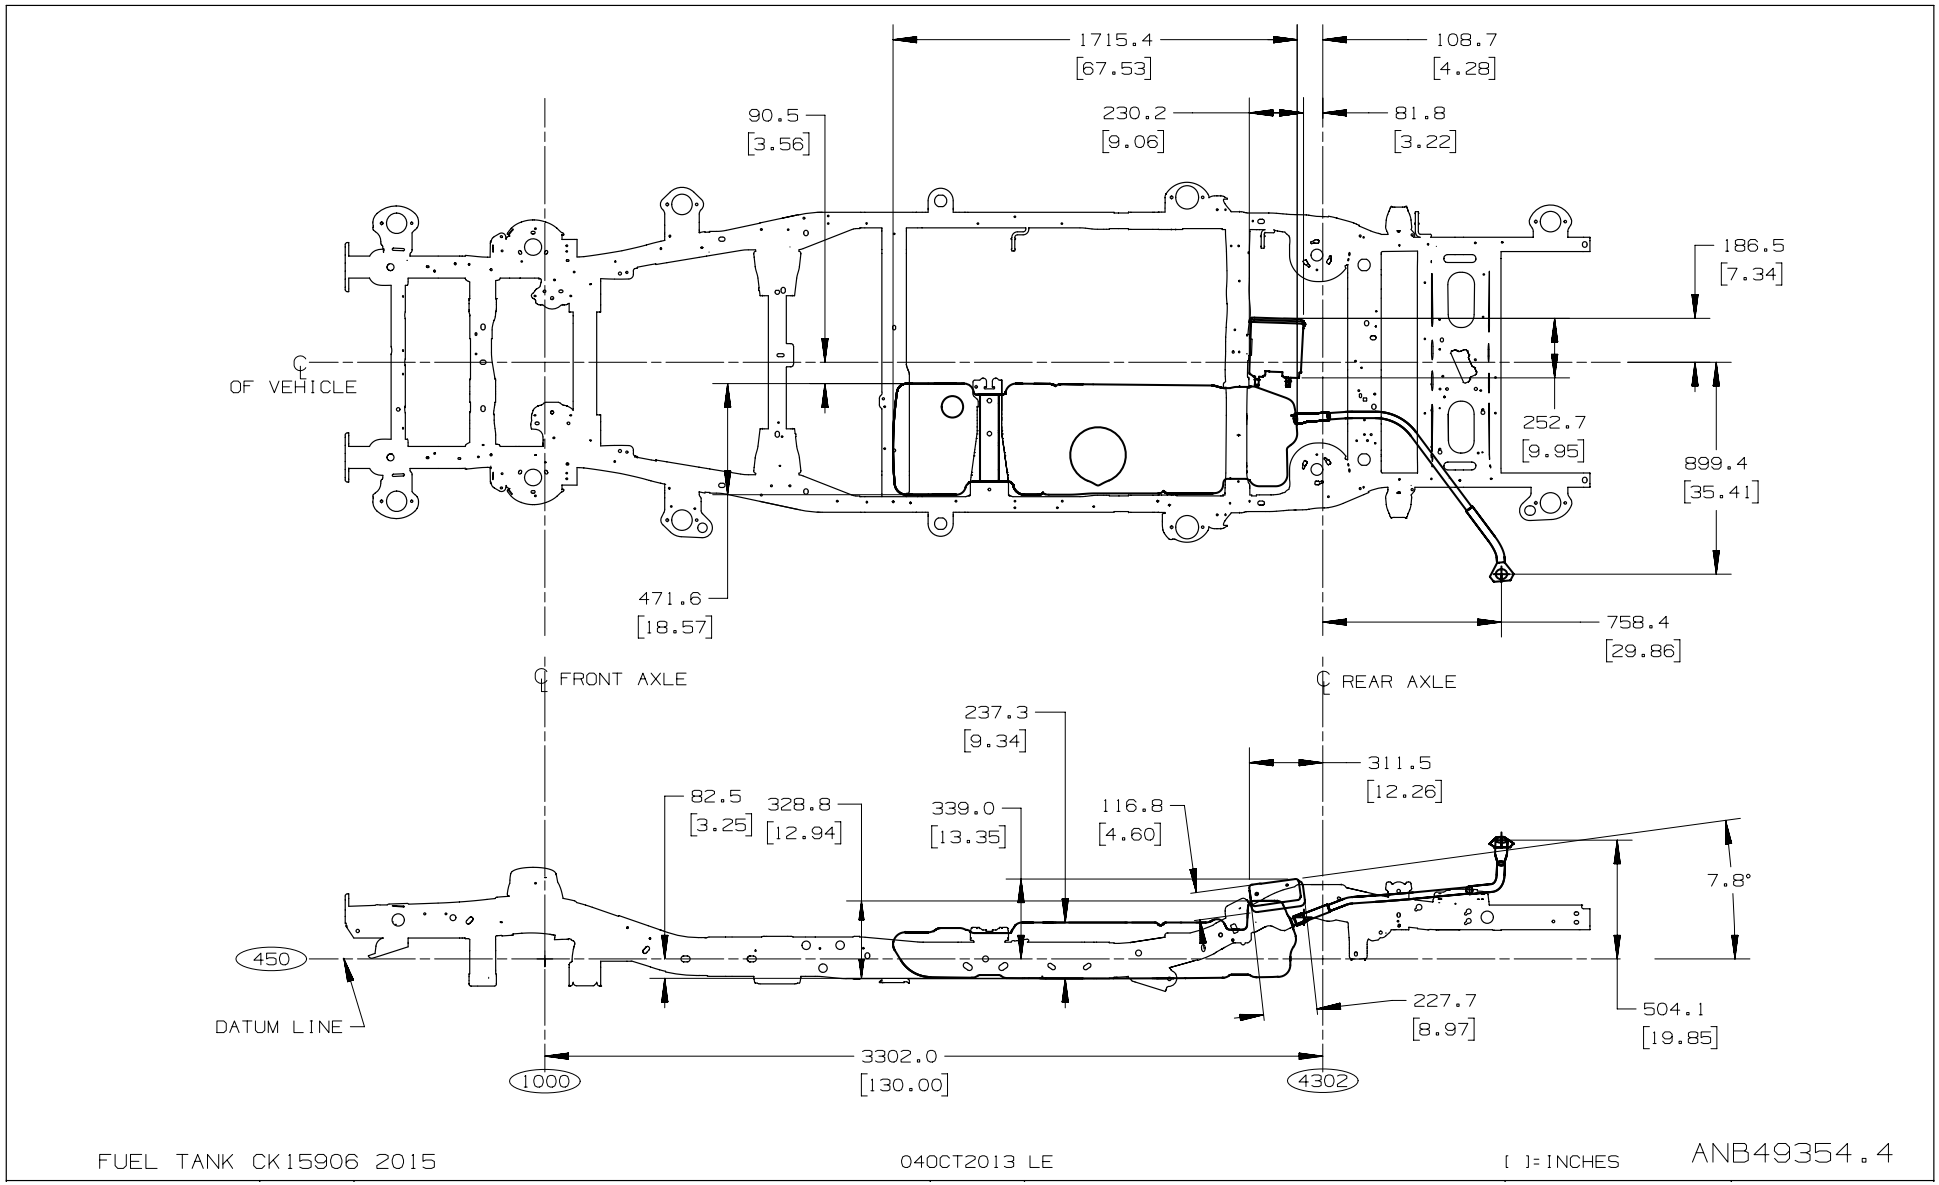

Full Size C/K Utilities

C/K 157/159 (06) L83 (5.3L V8) – Exhaust System

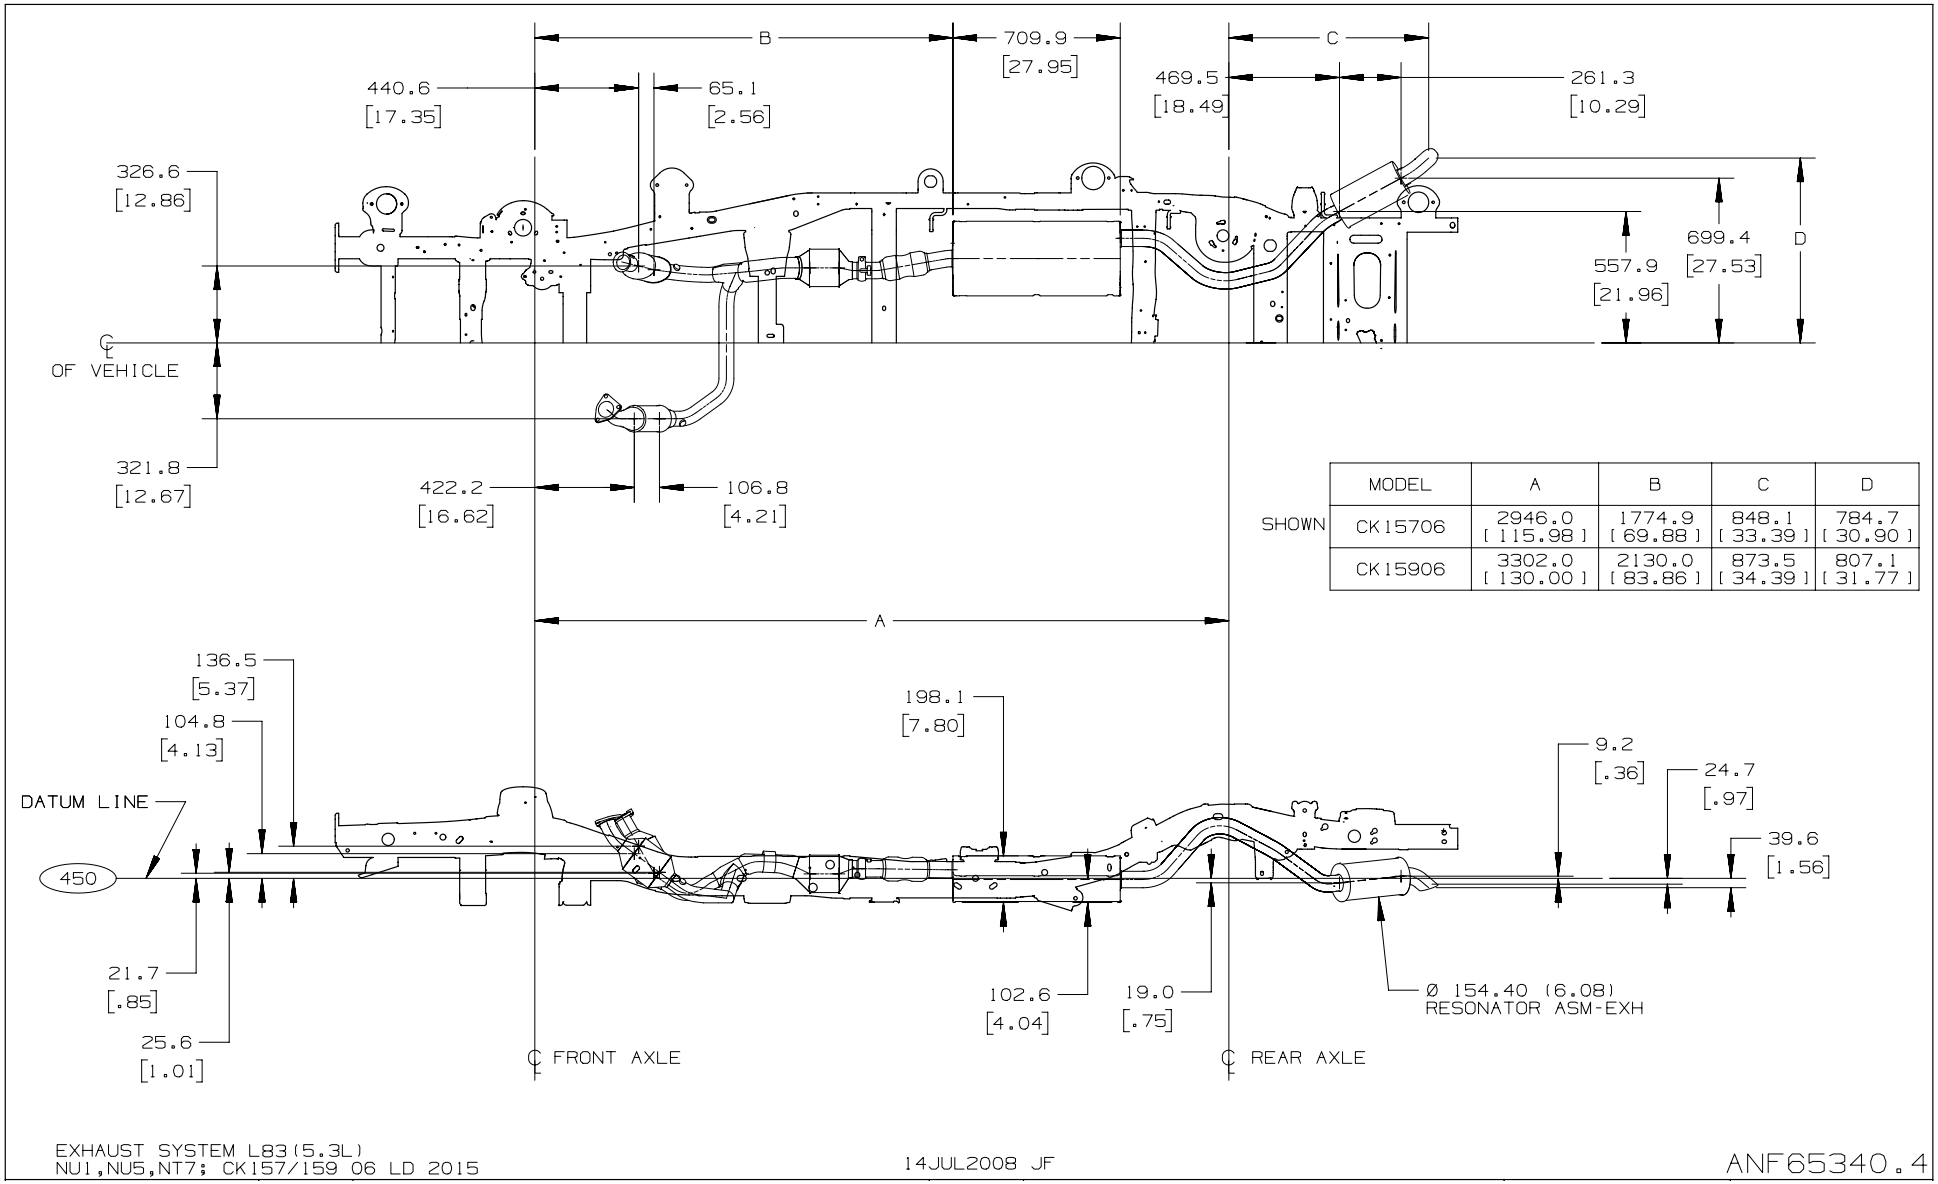

	MODEL	A	B	C	D
SHOWN	CK15706	2946.0 [115.98]	1774.9 [69.88]	848.1 [33.39]	784.7 [30.90]
	CK15906	3302.0 [130.00]	2130.0 [83.86]	873.5 [34.39]	807.1 [31.77]

EXHAUST SYSTEM L83(5.3L)
NU1,NU5,NT7; CK157/159 06 LD 2015

14JUL2008 JF

ANF65340.4